veterinary technology for life Eickemeyeenee

www.vetpood.ee

tartu@estdoma.ee - tel 7362 716

Kevadkampaania 2022



Kehtib 30 / 03 / 2022 – 30 / 06 / 2022 NB. Hindadele lisandub käibemaks!



EICKEMEYER® NARKOVET LIGHT ANAESTHETIC UNIT

The EICKEMEYER® NarkoVet LIGHT is a cost-effective mobile anaesthetic machine, using quality parts like the MSS Vaporiser. It includes breathing circuits and an anaesthetic gas filter.

- ▶ High accuracy Flowmeter, 0.1 5 l/min
- EICKEMEYER® TEC 3 Isoflurane Vaporiser
- Oxygen bypass (O₂ flush)
- > 22 mm outside Ø / 15 mm inside Ø patient outlet
- Ayre's T-Piece Breathing Circuit for patients under 7 kg
- Semi-disposable Circle Circuit for patients over 7 kg including patient hose with Y-piece, 2.0 l breathing bag and APL pressure relief valve
- EickSorber Anaesthetic Gas Filter with holder and exhaust pipe
- Storage tray and hooks for additional breathing bags
- Stable 5-star base, Ø: 54 cm
- Dimensions (in cm): H 142 x W 67 x D 54
- Weight: 14.5 kg

213071



O₂ Upgrade for NarkoVet LIGHT

The O_2 upgrade consists of the reliable OxyVet IV Oxygen Concentrator and a stable bracket onto which the NarkoVet LIGHT is mounted. O_2 concentrators save money and energy, with very low power consumption and no need for an oxygen bottle.

213072



OxyVet IV Oxygen Concentrator

- Saving costs and effort: No oxygen bottle required, lower power consumption
- Simple operation thanks to the clear arrangement of the setting functions and monitoring information
- High patient safety through visual and acoustic alarms
- Noise level: ≤ 55 dbA
- Flow rate continuously adjustable from 0.5 – 5 l/min
- Output of up to 93 % oxygen (± 3 %)
- Incl. Bubble humidifier and O₂ hose
- Dimensions (in cm): L 34 x W 37 x H 67
- Weight: 15.3 kg
- 1 year warranty

213180





Starter Kit for NarkoVet LIGHT

This set provides the necessary accessories to perform anaesthesia on dogs and cats.

- Safety Key Filler for isoflurane
- Soda lime, 5 l, with colour change
- 3 breathing bags (1, 3 and 5 l)
- 6 Anaesthesia Masks (size 1 6)
- 9 Tracheal Tubes (2.5 10.0 mm)
- Basic Laryngoscope







EICKEMEYER® NARKOVET BASIC ANAESTHETIC UNIT

The NarkoVet Basic is a complete anaesthesia machine. Depending on the size of the patient it is supplemented with a corresponding anaesthetic system. Due to its low cost and ease of use, the device is ideal for entry into inhalation anaesthesia.

Table Model

- High accuracy Rotameter, 0.1 5.0 litres
- EICKEMEYER® TEC 3 Isoflurane Vaporiser
- Oxygen bypass •
- Patient outlet: Ø outer: 22 mm; Ø inner: 15 mm

213067



Circle Breathing System (semi-disposable)

- For patients >7 kg
- ▶ Twin patient tubing with 360° swivel y-piece
- 2 litre rebreathing bag •
- Scavenge Adapter: 30 mm female to 22 mm male
- APL valve

213096



Avre's T-Piece

- For patients < 7 kg
 - Length: 1.8 m includes:
 - 0.5 litre rebreathing bag



►






OxyVet III Oxygen Concentrator (5 l)

An oxygen concentrator draws in room air, separates the oxygen from other gases in the environment and delivers the oxygen at high concentrations.

- Flowrate: 0.5 to 5 l/min
- Oxygen concentration: 93 % ± 3 %
- Sound level: 40 dbA (50 Hz)
- Electrical requirements: 230 V / 50 Hz
- Power consumption: approx. 290 watt @ 2 l/min and approx. 312 watt at 5 l/min
- Dimensions (in cm): L 34 x W 30.4 x H 62
- Weight: 16.3 kg
- 3 Year Warranty

213175



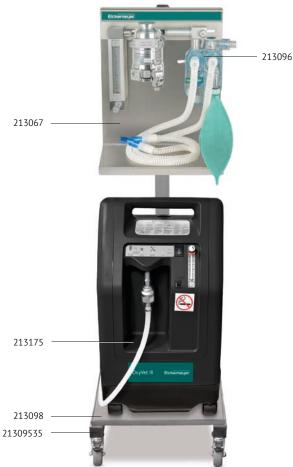



Meie

e-pood www.vetpood.ee



EICKEMEYER® NARKOVET ANAESTHETIC UNIT

The EICKEMEYER[®] NarkoVet Anaesthetic Unit is now even more flexible: Can be set up as a desk, wall or stand model.

Table mounted Model

- Flow Meter (0.1 5.0 l/min)
- System pressure gauge
- Infinitely adjustable pressure relief valve
- Oxygen bypass
- EICKEMEYER® TEC 3 Isoflurane Vaporiser
- Soda Lime canister and accessories
- Safety valve for manual ventilation included (item no. 213083)
- Suitable for small animals up to 80 kg
- Dimensions (in cm): L 32 x W 25 x H 51

213062



Anaesthetic Unit Trolley

21309535



Anaesthetic Unit Oxygen Concentrator Shelf





Wall Bracket for EICKEMEYER[®] Anaesthetic Unit 21309403



Anaesthetic Unit Top ShelfFor monitoring devices





NarkoVet Anaesthetic Starter Kit Includes:

- Isoflurane Safety Key Filler
- EickSorber Anaesthetic Gas Absorber
- Scavenging System Hose, 2 m, transparent

.....

- 3 Soda Lime Anaesthetic Absorber 5 L
- 3 Rebreathing Bags (1, 3 and 5 l)
- ▶ 6 Anaesthesia Masks (sizes 1-6)
- 9 PVC Endotracheal Tubes (2.5 10.0 mm)
- Laryngoscope Basic
- 1.5 V Spare Battery





LIFEVET PT PULSE OXIMETER WITH TEMPERATURE MEASUREMENT

The portable LifeVet PT can measure and display the functional oxygen saturation of arterial haemoglobin (S_pO_2) , pulse rate and body temperature in real time in dogs, cats, and horses. All important parameter information can be easily read on the large LCD display.

- Small, handy and sturdy
- Immediately ready for use no calibration necessary
- Display of oxygen saturation from 35 to 100 %
- Display of the pulse rate from 25 to 400 beats per minute (bpm)
- Display of body temperature from 18 to 45 °C
- Alarm limits (optical & acoustic) individually adjustable
- > 2.8" TFT LCD colour display with battery level indicator
- Can be connected to a computer via USB
- Fest results can be stored for up to 360 hours
- Incl. S_PO₂ sensor with two sensor clips (large & small), temperature probe, universal charger, USB cable, Li-Ion battery, protective silicone case and holder for tabletop use
- Dimensions (in cm): H 14.2 x W 7.8 x D 2.8
- Weight: 250 g (device only)





Meie

e-pood

LIFEVET 8M/8C MULTIPARAMETER MONITORS

The LifeVet 8 is a modern, high performance patient monitor that delivers flexibility and efficiency in a compact and portable device. Operation via touch screen is easy and the shortcut buttons provide quick and direct access to the most important functions.

- Multiparameter display of Respiratory Rate (RESP), Pulse Rate (PR), Oxygen Saturation (S_pO₂), Blood Pressure (NIBP), Electrocardiogram (ECG), Temperature (TEMP) and Sidestream Capnography (CO₂ – only LifeVet 8C)
- ▶ High resolution 8.4" LED touch screen with up to 8 waveforms
- Freely selectable alarm limits and 360° visible alarm display
- Mains and battery operation (up to 4 hours)
- Incl. Li-Ion Battery, NIBP Cable with Cuff, ECG Cable with Clamps, S_pO₂ Sensor with Clips, Temperature Probe and CO₂ Adapter, CO₂ Cable and Water Trap (CO₂ only LifeVet 8C)
- Dimensions (in cm): W 27 x H 21 x D 11
- Weight: ≤ 3.2 kg





ZWEEZI SADDLE STOOL

ZWOOZI ROUND STOOL

- Padded synthetic leather seat
- Adjustable height: 58 85 cm
- Seat width: 40 cm
- Gas lift mechanism
- Base diameter: 54 cm
- 5 star base with swivable castors
- Colour: evergreen

610176





- Padded synthetic leather seat
- Adjustable height: 64 85 cm
- Seat width: 35 cm
- Gas lift mechanism
- Base diameter: 54 cm
- 5 star base with swivel castors
- Colour: evergreen

610177





SCORE® STOOLS

The ever so popular SCORE[®] treatment stools now come in fresh colours – real eye-catchers for your practice!

- Comfortable, cushioned seat
- Easily washable synthetic leather
- Smooth running double castors
- Aluminium base diameter: 54 cm

SCORE® JUMPER

- Cushioned saddle seat
- Adjustable height: 59–77 cm





Adjustable height: 59–77 cm



	JUMPER	AMAZONE	MEDICAL
Colour	ltem No.	ltem No.	ltem No.
Black	61010001	61011001	610120
Anthracite	610101	610111	610121
Capri Blue	61010201	61011201	61012201
Forest Green	61010301	61011301	61012301
Burgundy	61010401	61011401	61012401
Orange	61010501	61011501	61012501
Pink	610106	610116	610126
Ochre Yellow	610107	610117	610127

SCORE® MEDICAL

 Traditional round seat
 Adjustable height: 55-74 cm







MAYO TROLLEY

- Suitable for using as an instrument stand during surgical procedures
- Stainless steel construction
- Four lockable castors
- Adjustable height: 90–132 cm
- Made in Germany
- Dimensions (in cm): L 40 x W 60

625160





SURGICAL TABLE FOR SMALL ANIMALS

Simply folds flat against the wall when not in use.

- BREUER pattern
- Wall mounted
- Stainless steel construction
- Easy to clean and disinfect
- Excellent size for small animal procedures
- Allows easy access to the patient
- Nine different height positions
- Eight different operation angles

606020





Meie

e-pood

ANIMAL STRETCHER TROLLEY

We get a lot of positive feedback regarding this Animal Stretcher Trolley. It will quickly become essential for transporting patients within your practice, and you will wonder how you ever managed without it. This mobile trolley has four lockable castors so patients can be transported and secured easily.

- 4 Lockable castors
- Aluminium frame with a washable nylon cover
- Maximum load capacity: 60 kg
- Dimensions (in cm): L 120 x W 52 x H 80





X-BASE OPERATING TABLE

The EICKEMEYER® X-Base Operating Table is our most popular surgery table. All components are of the highest quality, making this table a great investment in the future of your practice.

- X-Base with 4 individually adjustable feet
- Provides best possible legroom and stability
- Good working posture whether sitting or standing
- Slim lift column made of aluminium, pump hydraulic or mains operated
- Self-contained, maintenance-free lift column
- Height adjustable from 72–112 cm
- Unidirectional 90° tilt mechanism, one hand control
- Stainless steel top with rounded, anti-drip edges and drain hole
- Two tabletop widths: 50 cm and 60 cm
- Optional heated tabletop
- Various colour options available

Illustration	RAL No.	Colour Electric		ctric	Hydraulic		
			50 x 130	60 x 130	50 x 130	60 x 130	
		Stainless Steel	602012	602010	602022	602020	
	3000	Flame Red	601500	601507	601470	601477	
	6018	Lime Green	601501	601508	601471	601478	
	5022	Night Blue	601502	601509	601472	601479	
	2001	Red Orange	601503	601510	601473	601480	
	6005	Moss Green	601504	601511	601474	601481	
	4010	Pink	601505	601512	601475	601482	

Kõik



Table Tie Down Cleats

- Stainless steel construction
- Mounted under the table

602005



Standard Rail System Enables quick, safe and variable fixing of the patients on the table.

605102

€ 350

Curved Dental Tray

with grid

With removable tray

Tray size (in cm): W 50 x D 35

Consisting of:

- 2x Standard Rails, side
- 2x Standard Rails, end
- ▶ 4x Tie Down Cleats, quick release
- 10x Tie Down Ropes, L 1 m

605050







HYDRAULIC LOW LIFT TABLE

The hydraulic lift mechanism helps protect your back. The heavy duty frame ensures stability throughout its range. All 4 castors can be locked simultaneously with the foot switch.

Technical specifications

- Minimum height: 49.5 cm
- Maximum height: 98 cm
- Maximum load: 100 kg
- Four lockable castors
- Tabletop dimensions (in cm): L 122 x W 60
- Includes: 6 tie-down cleats







Eickemeyer

LOW LIFT SCISSOR TABLE II

The EICKEMEYER® Low Lift Scissor Table II is perfect for lifting and transporting larger patients without unnecessary handling and movement. The basic stationary table is available in eight different colours and the additional options available make this table a real all-rounder for your practice.

- Ideal for examination, prep, dental treatment and procedures
- Minimum height of 28 cm allows large dogs to walk onto the table
- Maximum height of 105 cm allows you to examine smaller patients without having to hunch and lean forward
- All parts made from high quality German stainless steel
- Smooth, polished tabletop (60 x 130 cm) with rounded corners, anti-drip edges and a drain hole
- Silent electric operation via foot pedal
- Includes power supply and tie down cleats

Variations RAL No. Stainless Steel 604200 3000 Flame Red 604201 6018 604202 Lime Green 5022 Night Blue 604203 2001 604204 Red Orange 6005 Moss Green 604205 Pink 604206 4010 9010 Pure White 604207

Roostevaba teras





Värviline

Additional Options

In addition to the stationary table, you can choose one or more of the following table options:

Battery Kit

.....

 Includes Battery and Charger

604307



Mobile Kit

 Includes Wheels, Battery and Charger

604306



Electric Tilt Option For tabletops 604301



Integrated Scale Option

Weighing range 0–120 kg
 604305

)7



Curved Dental Tray

€ 750.-

- With removable tray with grid
- Tray size (in cm):
 W 50 x D 35













DR. MACH LED 130 EXAMINATION AND THEATRE LIGHTS

The DR. MACH LED 130 has been our best selling LED light over the past years with hundreds of installations across the UK and Europe. Whether in prep, dental or in the operating theatre, the LED 130 supports veterinary professionals with superior technology, invariable reliability and great design.

- Colour rendering index: Ra ≥ 95
- Electric dimmer, 50 100 %
- Colour temperature: 4,300 kelvin
- Light head diameter: 33 cm
- Number of LEDs: 19
- Power consumption: only 28 W
- Optional sterilisable Handle (611266)

DR. MACH LED 130 PLUS

- 100,000 lux at 1 m working distance
- Fixed light field: 12 cm at 1 m

DR. MACH LED 130 PLUS				
Item No.	Model	€		
611736	Stand Model, mobile	2233,-		
611737	Wall Model with 171 cm reach	2100,-		
611738	Ceiling Model, up to 3 m	2472,-		

DR. MACH LED 130 F

- > 70,000 lux at 1 m working distance
- Focusable light field: 14–25 cm at 1 m

DR. MACH LED 130 F					
ltem No.	Model	€			
611733	Stand Model, mobile	2472,-			
611734	Wall Model with 171 cm reach	2372,-			
611735	Ceiling Model, up to 3 m	2712,-			

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, € 75

DR. MACH LED 150 THEATRE LIGHTS

Based on the continuing success of the LED 130, the LED 150 offers a larger light head diameter and more light intensity. The Sterilisable Handle can be removed for sterilisation and additional handles can be purchased separately.

- Colour rendering index: $R_a \ge 96$
- Electric dimmer: 50–100 %
- Light head diameter: 38 cm
- Number of LEDs: 26
- Power consumption: only 35 W

DR. MACH LED 150 (SWING)

- 110,000 lux at 1 m working distance
- Colour temperature: 4,000 kelvin
- Fixed light field: 19 cm at 1 m

DR. MACH LED 150					
ltem No.	Model	€			
612930	Stand Model, mobile	3324,-			
612931	Wall Model with 171 cm reach	3018,-			
612932	Ceiling Model*,	3669,-			
	for ceiling heights of 2.60–3 m				

DR. MACH LED 150 FP (SWING)

- > 130,000 lux at 1 m working distance
 - Colour temperature: 4,300 kelvin
- Focusable light field: 17–24 cm at 1 m

DR. MACH LED 150 FP				
ltem No.	Model	€		
612936	Stand Model, mobile	3.873,-		
612937	Wall Model with 171 cm reach	3567,-		
612938	Ceiling Model*,	4265,-		
	for ceiling heights of 2.60–3 m			

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, € 75



DR. MACH LED 300DF THEATRE LIGHTS


The latest addition to the range of the quality manufacturer DR. MACH impresses with the highest light intensity at an extremely attractive price. The light beams of the three LED clusters can be bundled using the sterilisable handle and, depending on the size of the wound area, also focused.

- 160,000 lux at 1 m working distance
- Focusable light field: 17 27 cm
- Colour rendering index: Ra ≥ 95
- Height adjustment: 118 cm
- Working area: 70–140 cm
- Number of LEDs: 36
- Lifespan of the LEDs: 60,000 hours
- Electronic brightness control on the luminaire body
- Including power supply

Wall Model

 With a total reach of 175 cm









Meie e-pood

612925

612912

.....

DR. MACH Power Supply

612918

€ 450;

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, € 75

DR. MACH LED 2SC THEATRE LIGHT

DR. MACH from Germany has been setting the standards in medical illumination technology for decades. The new generation of lights with LED technology continues this tradition and supports veterinary professionals with superior technology and design.

- SC: Single Color Chip
- Focusable light field from 17–28 cm / 1 m working distance
- Punctual illumination of the deepest wound channels with
- high light intensity
- Integrated light field merging
- Exact adjustment of the light field diameter to the wound field size
- Low heat development
- Hardly any lamp wear due to long-life LEDs (50,000 hours)
- 115,000 lux light output / 1 m working distance
- Height adjustment: 118 cm
- Working range: 60–150 cm
- Lamp body diameter: 49 cm
- Please order power pack separately (included with tripod model)
- Ceiling Model: Ceiling heights between 2.6 to 3.0 m (other ceiling heights upon request)

612912

€ 6740-

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, € 75

Eickemeyer

EICKEMEYER® I.V. FLUID WARMER

- For warming up all intravenously administered liquids
- LED display with temperature display
- Temperature control from 35 to 42 °C in 0.1 °C steps
- Warm-up time: less than 2 min
- Dimensions (in cm): L 18 x W 7 x D 3.5
- Weight: 200 g (without mounting clamp)







- LCD display with backlight
- Adjustable audible and visual alarms
- Flow rate: 0.1 up to 1,500 ml/h
- Accumulated volume: 1–9,999 ml
- Mains and battery powered (up to 4 h)
- With pole clamp
- Dimensions (in cm): W 14.6 x H 19.3 x D 9.5
- Weight: 1.6 kg

402080





INFUSOVET CONNECT INFUSION PUMP

- ▶ 4.3" color touchscreen for easy operation
- Adjustable audible and visual alarms
- Suitable for bloods
- Flow rate: 0.1 2,000 ml/h
- Bolus rate: 0.1 2,000 ml/h (automatic and manual)
- Occlusion level: 5 levels selectable (50-900 mmHg)
- Mains and battery powered (up to 10 h)
- With clamp for IV pole and cage holder
- For EICKEMEYER[®] infusion sets (item no. 402071)
- Dimensions (in cm): W 13.8 x H 13.2 x D 9
- Weight: 1.5 kg







MAGIC 500 PLUS PORTABLE ULTRASOUND UNIT

The MAGIC 500 PLUS sets a new standard of mobility for pregnancy testing in the field.

- Long service life: due to the long battery life of the battery supplied, unforeseen extended scanning sessions are not a problem.
- Efficient workflow: Performing measurements on stored images ensures an efficient examination process
- Via a WiFi connection images and videos can be transmitted wirelessly to external devices (PC, laptop, tablet, smartphone) as well as monitors
- Higher diagnostic reliability with Cine Memory (256 frames)
- Individually adjustable ultrasound image
- Protection by splash-proof venting and membrane keypad
- Mounting rings and straps for easy hanging around the neck

Areas of application

- Pregnancy examinations in cattle and horses
- Adjustment aids for optimal work
- Standard measurements and vet pregnancy calculation
- Anti-reflective ultrasound image individually adjustable
 Measurements below 1 mm possible (fat layer thickness
- measurement)
- Back fat and loin thickness calculation

Technical specifications

- 15 cm LED Monitor
- Black-and-white system
- Images and video clips can be saved on the device
 Incl. a switchable, changeable transducer 6.5 MHz, linear rectal, frequency switching of: 4.5/5.5/6.5/7.5 MHz

Meie

e-pood

- Integrated battery with up to 5 hours runtime
- Dimensions (in cm): W 16 x H 16 x D 7
- Weight: 1.1 kg
- Incl. a glove for the left hand (right glove can be reordered) and carrying case

303790



MAGIC 3000 PLUS PORTABLE ULTRASOUND UNIT



MAGIC 6000 PLUS PORTABLE ULTRASOUND UNIT

A new dimension in image quality


The MAGIC 6000 PLUS not only opens a new dimension of image quality in small animal abdominal sonography, the device can also be used in equine gynaecology and orthopaedics. With a powerful cine mode, you can always keep an overview even with restless patients under difficult conditions.

- The powerful hardware and a large number of image adjustment parameters create an unbeatable image quality in this price range
- Power Doppler to identify blood flow in different clinical conditions
- PW Doppler and "auto trace" reveal details of blood flow for a more complete diagnosis
- Easy to use thanks to combined keyboard and menu navigation
- Þ Programmable buttons for personalised workflows
- iTouch™, iClear™, iZoom™, iBeam™, iScape™ and iStation™ ▶
- The high-resolution 15" display, which can be tilted by 60 degrees, provides a good image even at a longer working distance
- A 500 GB storage capacity allows processing still images and video sequences at a later point
- Second probe connection allows for a quick probe swap during • examination - ideal for small animal practices
- Various application-specific measurements for abdomen and gynaecology including pregnancy calculation
- Dimensions (in cm): W 36 x H 36 x D 15
- Weight: 8.1 kg

303740

Þ



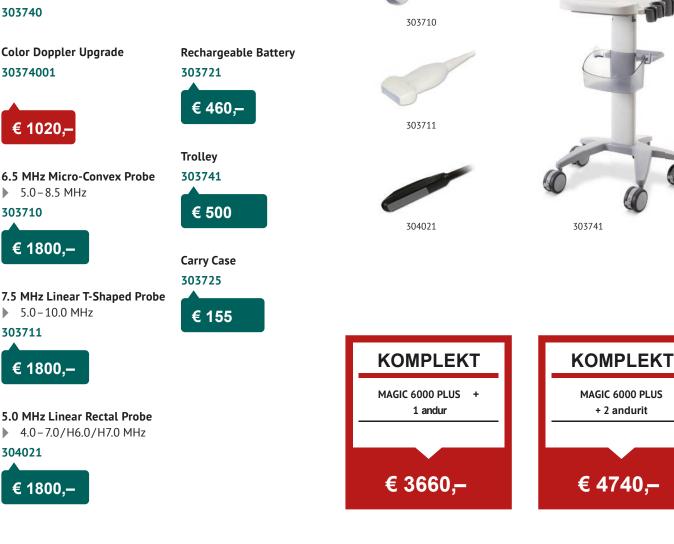

MAGIC P1 PORTABLE ULTRASOUND UNIT

Highest mobility meets highest performance

The MAGIC P1, with its advanced features, is one of the most highly developed Premium Colour Doppler systems in laptop format. The exceptionally hi-tech equipment guarantees excellent picture quality in all applications.

Adjustment aids for optimal work

- Clear patient management
- Optimised image resolution is adjustable
- Improved pre- and post-processing
- Image magnification without quality loss
- Auto Doppler: automatic image parameter adjustment

Special features

- Excellent image quality through the use of state-of-the-art image enhancement tools
- Simple report function
- Special Vet Software (body marks, pregnancy examination)
- Single crystal technology for brilliant cardio images
- Extremely fast: boot time from standby mode is only 5 seconds!
- Long battery life of up to 90 minutes

Technical specifications

- Picture modes: B, B + B, B + M, M, CDI, B + CDI, PW, CW
- Doppler modalities: Colour, PW, CW Doppler
- 15" LED HD Monitor, tiltable
- Internal memory 240 GB
- 2 probe connections, 2 USB ports
- Image export in Windows formats (DICOM optional)
- Dimensions (in cm): W 35 x H 6.5 x D 37

Weight: 4.9 kg













CT, MRI AND ULTRASOUND POSITIONER

- Facilitates positioning of patients to allow abdominal ultrasonography
- Perfect positioning helps keep the patient calm and comfortable
- Robust, easy to clean and disinfect

Size 1

Size 3

- Suitable for cats/small dogs
 - gs Suitable for large-sized dogs

Þ

Dimensions (in cm): W 25 x H 10 x L 80

303991





Dimensions (in cm):

Size 2

- Suitable for medium-sized dogs
- Dimensions (in cm):
 W 35 x H 14 x L 100







ULTRASOUND TABLE ATTACHMENT WITH CUTOUT

The redesigned EICKEMEYER[®] Ultrasound Table is the perfect solution for cardiac ultrasound examinations.

- Redesigned ergonomic cut out for cardiac ultrasound examinations
- 5 foldable feet for easy storage
- Ergonomically designed recess
- Provides ample elbow room for the examiner
- Compatible with Examination Tables (Width: 45 cm / Length: 100 cm)
- Dimensions (in cm): W 60 x H 19 x L 14


303976



Ultrasound Table Mat with Cutout

- For Ultrasound Table (item no. 303976)
- Velcro straps for a secure fit



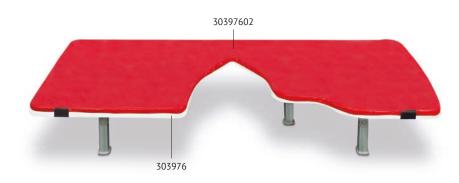

PROFIDENT PLUS DENTAL UNIT

The Profident PLUS is the result of many years of experience. It offers a wide range of applications for both, general practitioners and dental specialists. It is characterised by its modern design combined with high mobility. The stand is adjustable in height and all handpieces are arranged within easy reach of the operator. When a handpiece is removed from its holder, the Profident PLUS automatically supplies air and water to it.

High Speed Turbine (300,000 rpm)

- Push button burr change for friction grip burrs (FG)
- Variable burr water cooling facility
- With LED Illumination

Low Speed Air Motor (20,000 rpm) with Straight Handpiece

- For long straight shank burrs (HP), diamond discs and prophy heads
- High torque, forward and reverse rotation
- Optional water cooling facility (item no. 174022)

Built-in Dental Scaler

- Handpiece with LED Illumination
- Includes 5 scaling tips

3 in 1 Syringe

- Precise finger tip control of water, mist or dry air
- Water connection to connect external dental scaler (e.g. item no. 176870)
- 174024



Dental Unit Air Compressor

- Powerful (340 watt)
- Quiet, 40 dB (A) (as a fan)
- Low maintenance

17430002





Scaler with LED lighting

Micro Oil Filter

- Reduces the oil content in the compressed air down to 0.01 %
- Helps extend the life of handpieces

17404301



Starter Kit

- Complete set, consisting of:
- 1x Bur Kit for Contra Angle
- 1x Prophy Cups
- 1x Polishing Paste
- 1x Cleaning Brush

EXP174004



17430002



Dental Handpiece High Speed (FG)



174024

Meie

e-pood

MOBILE DENTAL CART

Turns every table into a dental treatment table!

With the Mobile Dental Cart from EICKEMEYER[®], every operating or treatment table becomes an ergonomic dental treatment table.

- For attachment to operating and treatment tables
- Ergonomic, curved dental tray with grate
- Easily removable tray for cleaning
- Made of stainless steel
- With 4 lockable smooth running castors
- Height adjustable from 75 100 cm
- Tray size (in cm): W 50 x D 35





DENTANOMIC DENTAL INSTRUMENTS - HANDLES AND TIPS

Easier, safer & faster dental surgery

DENTANOMIC instruments are premium surgical tools with superb tempered & hardened modular blades making dental extraction in dogs and cats easier, safer and faster.

- Blades are made from top quality, hardened stainless steel and cut much better than conventional instruments
- Unique modular design allows easy blade replacement when blades are blunt or damaged
- Ergonomic handle design promotes safe palm grip, only minimal finger force is required to stabilise the cutting edge
- Standard handles are perfectly balanced and sized for surgeons with hands up to 7.5 glove size

Ergonomic Handles

Blue	Blue, longer shaft
175000	175005
Green	Green, longer shaft
175001	175006
Pink	Pink, longer shaft
175002	175007
Orange	Orange, longer shaft
175008	175003
Purple	Purple, longer shaft
175009	175004
175009	175004
Elevator Tips	Luxator Tips
Elevator Tips	Luxator Tips
2 mm	1.5 mm

4 mm

5 mm 175108

175107



Each Handle

€ 75,-





Elevator Tips



Luxator Tips

5 mm

DENTANOMIC DENTAL INSTRUMENTS – ACCESSORIES

Storage and Sterilisation Rack For 9 Blades



175200







DENTANOMIC Honing Pack

- Extra fine
- Incl. 2 Sharpeners

175201



Spare Key For DENTANOMIC Handles

E17500001





175200





175201

E17500001

The DigiVet DR Dental X-Ray Sensor gives you the power to capture high quality digital X-Rays and view them instantly with the powerful METRON Software included.

DigiVet DR

- With USB port and high-resolution CsI scintillator
- Dimensions: 42 x 31 mm, height 5 mm/13 mm (cable)
- Active area: 34 x 26 mm
- Resolution: 20 lp/mm
- Pixel size: 20 x 20 micron
- Number of pixels: 2.21 million

METRON Software

- Intuitive acquisition and image editing software
- DICOM interface integrated
- Tooth charts for the assignment of X-Ray images

708032







DIGIVET CR PLUS DENTAL X-RAY READER

The easy-to-use DigiVet CR PLUS Dental Reader now delivers even better images. With a resolution of 21 lp/mm, the digital imaging plate system leaves nothing to be desired.

- Optimised workflow for your practice
- Dental imaging plates from size 0 to 4c
- Magnetic feeding tray with erase function
- Easy-to-use imaging Software incl. DICOM (Send/Retrieve)
- Compact dimensions (in mm): H 265 x W 120 x D 318

Includes DigiVet CR PLUS Starter Kit

- 4x size 2 Imaging Plates (31 x 41 mm)
- 1x size 4c Imaging Plate (48 x 54 mm)
- ▶ 100x Hygienic Bags, Size 2
- ▶ 100x Hygienic Bags, Size 4c

708035









Application

Meie loomaarstidele mõeldud e-pood asub alates sellest aastast aadressil vetpood.ee

Meie eesmärk on olla suurim eestikeelne antud valdkonna e-pood. Seetõttu on eesmärk hoida info värskena ning otsida juurde uusi tooteid ja partnereid.

Püüame hoida e-poe lihtsana, kuid aegajalt võime ülesehitust mõnevõrra muuta.

Kui leiate, et e-poe mõni leht ei ole arusaadav või mugav kasutada, andke sellest palun märku meie üldkontaktidele. Toodete ja tellimustingimuste kohta küsige palun lisa tartu@estdoma.ee või telefonil 7362 716.

Asume alates 2022a. jaanuarist aadressil vetpood.ee



Lisainfo: tartu@estdoma.ee

DIGIVET DR FLAT PANEL DETECTOR

The DigiVet DR is the latest easy DR solution that requires no change to your conventional X-Ray System. A large coverage area of 17×17 " (43 cm x 43 cm) enables a quick and effortless integration. This solution not only enables ultra-fast acquisition times of only 1.2 seconds but also features an amazing 9.4 Megapixel resolution. The DigiVet DR comes with VXvue, a user-friendly and versatile imaging software that is compliant with the DICOM 3.0 standard.

- Scintillator: CsI(Tl)
- Panel technology: a-Si TFT with PIN diode
- Pixel Pitch: 140 x 140 um
- Resolution: 9.4 Megapixel (3,072 x 3,072 pixels)
- Image size: 17" x 17" (43 cm x 43 cm)
- A/D Conversion: 14 bit
- Grayscale: 16,384 grayscales
- Interface: Gigabet Ethernet
- Automatic Exposure Detection (AED) imaging technology
- Dimensions (in mm): W 470 x L 470 x H 15
- Weight: approx. 4.5 kg





Versatile portable flat panel detector for digital X-Ray imaging for use in mobile equine practice. This device is a portable flat panel detector with an active area of 25 x 30 cm for digital X-Ray imaging in various applications. Its 124 µm pixel TFT sensor enables high-resolution images and its WLAN communication system offers fast, wireless transmission speed. X-Ray images can be transferred directly to a computer or laptop with a WiFi connection. In addition, the reliable Anytime[™] automatic X-Ray exposure detection enables users to conduct examinations with any type of X-Ray system.

- Active area of 25 x 30 cm (10 x 12")
- Highest resolution with CsI PLUS scintillator
- High spatial resolution with a field size of 124 µm for each pixel
- Fast, wireless data transmission via dual band (2.4 GHz and 5 GHz)
- ▶ Stable and reliable automatic exposure detection (Anytime[™])
- ▶ Direct communication with smart devices (Inside APTM)
- Viewer software runs on the Windows[™] operating system (VXvue[™])
- Areas of application: horse and cephalometry

Technical specifications

- Scintillator: CsI (DQE technology for reduced dose)
- Pixel pitch: 124 μm x 124 μm, resolution: >4 lp/mm
- Active area: 2,048 x 2,560 pixels
- Analog-digital conversion (AD conversion): 16 bit
- Grayscale: 16,384 levels
- X-Ray voltage range: 40–150 kVp
- X-Ray generator interface: Automatic trigger: AED mode
- Wireless interface: IEEE 802.11ac (2.4 GHz / 5 GHz dual band)

Meie

e-pood

- Image recording time (via cable / WiFi): 1.5 sec. / 3 sec.
- Battery: Lithium Ion, 3,400 mAh
- Dimensions (in cm): L 28.7 x W 35 x H 1.5
- Weight: 2.1 kg

708485





ACCESSORIES X-RAY

X-Ray Aprons

- Lightweight and comfortable protection
- Water repellent and stain resistant nylon
- Velcro side straps
- 0.5 mm lead protection
- Colour: Dark blue

Size M

- Shoulder width: 41 cm
- Body height: 170–180 cm

704935



Size L

- Shoulder width: 43 cm
- Body height: +180 cm

704945



X-Ray Thyroid Protection Collar

- Helps protect the most radiation sensitive organ of the body
- 0.5 mm lead protection
- Soft collar with a Velcro closure
- One size fits all

705001



X-Ray Mittens

- Ideal for holding small animals
- 0.5 mm lead protection
- Pair
- One size fits all

705750



X-Ray Gloves

- Comfortable to wear while holding small animals
- One size fits all
- 0.5 mm lead protection
- Flexible material
- Pair

705553





704945

Zlig - the history

The tear of the anterior cruciate ligament is still one of the most common orthopaedic diseases in dogs. The path of the many surgical methods developed for this vary from intracapsular and extracapsular techniques to modern corrective osteotomies that alter the geometry of the affected knee joint. With the development of new materials in medical technology, it is now possible to replace the cranial cruciate ligament in an anatomically correct manner, instead of changing the forces acting on the joint. After a long period of preparatory work by the French Dr Jacques-Phillipe Laboureau, a suitable synthetic ligament is now available for the intra-articular cruciate ligament replacement in small animals. Together with the instrumentation developed by EICKEMEYER®, this new technique for cruciate ligament replacement can now be performed.

Zlig – the implant

The Zlig consists of ultra-high-molecular polyethylene with the special feature that the woven structure of the implant is interrupted intra-articularly by "free fibres". Free parallel fibres reduce fatigue and also encourage the ingrowth of fibroblasts and collagen. Each implant is delivered in a sterile packed sleeve, making it easier to handle the implant before it is inserted into the joint. A selection of sizes with different resistances and fibre lengths are available to fit different patient sizes.

Zlig - the technology

In this technique, an artificial ligament is used as a total replacement for the anterior cruciate ligament using tunnel-tunnel-technique. The ligament is fixed in the tibia and Os femoris using specially developed cannulated interference screws in drill channels. The screws are guided parallel to the ligament using a guiding wire to avoid deviations. The technology does not cause irreversible damage and the results are reproducible thanks to a quick learning curve. Another great advantage of the technique is the fact that patients can put weight on the hind leg immediately after the operation without any risks.

16 Fibres / 10 mm

5-8 kg 2,000 N

191501

24 Fibres / 15 mm
8 − 12 kg
3,000 N


191502

32 Fibres / 17 mm ▶ 12 – 25 kg

▶ 4,000 N

191503





QR code for the application video of the Zlig

48 Fibres / 19 mm

48 Fibres / 22 mm

48 Fibres / 25 mm

25-45 kg

6,000 N

25-45 kg

6.000 N

25–45 kg

6,000 N

191504

191505

191506

Þ



ORTHOVET PRO BATTERY POWERED DRILL SYSTEM

The ideal tool for small animal osteosynthesis

The OrthoVet PRO is a modular, battery driven drill system designed for small animal osteosynthesis. The modular system consists of a handpiece and four attachments, which can be changed intraoperatively in just a few seconds with a keyless quick coupling.

The handpiece, the quick release AO Chuck and the Jacobs Chuck are cannulated. Thus, cannulated screws or drills can also be tracked over long guide wires in stages, without the guide wire having to be shortened. The oscillating saw has a fivefold adjustable, variable fixation of the saw blade and allows the surgeon an optimised view of the surgical field. The AO quick coupling completes the system and makes the OrthoVet PRO a real all-rounder.

The handpiece and attachments can be sterilised / autoclaved. The Li-Ion Battery is not autoclavable and is inserted into the handpiece by means of special holder. Continuous operation is possible in clockwise and counterclockwise motion, as well as in oscillation with the saw attachment.

- 4 attachments: Jacobs Drill Chuck, Quick Release AO Chuck, Quick Release Chuck for KIRSCHNER wires, Oscillating Saw with Saw Blades
- Fully Cannulated Handpiece
- Autoclavable
- Includes 2 Li-Ion Batteries with Charger and Transport Case

Technical specifications

- ▶ Infinitely variable speed: 0 1,200 rpm
- Oscillation mode: 0-16,000 ocs/min
- Battery type: Li-Ion
- Battery charging time: 180 min
- Weight (includes Battery): 933 g











TONO-PEN VET™ TONOMETER

The Tono-Pen VET[™] has become the veterinary professions standard over the past 20 years, this easy-to-use, hand-held instrument provides accurate IOP readings.

Tono-Pen VET[™] has a lightweight, ergonomic design with advanced electronic measurement technology that enables operators to take fast and accurate IOP measurements with minimal training. The long-life OCU-CEL[™] VET batteries help ensure that Tono-Pen VET[™] will be ready to use when needed.

Sterile OCU-FILM[®] + tip covers are used to minimise the risk of cross-contamination between uses.

- Easy to read, digital display
- Measuring range: 5 80 mmHg
- Long battery life
- Maintenance-free
- Dimensions (in cm): L 18.4 x W 2.5 x D 2.2
- Lightweight: 64 g
- Includes: 150 tip covers

173560



Ocu-Film® + Tip Covers

- Minimises the risk of cross-contamination
- 150 per pack

173565





TONO-PEN AVIA[®] VET™ TONOMETER

With over 40 breeds of dogs and cats possessing a predisposition to glaucoma, the Reichert Tono-Pen Tonometer provides simple solution to monitor this condition. The Tono-Pen AVIA® VET[™] will not require any calibration and is ready for use. The battery lasts four times longer, and boasts a larger LCD screen.

- Patient can be positioned in any way
- Fast and accurate IOP measurement with minimal training
- Less corneal irritation due to smaller sensor
- Disposable covers to eliminate cross contamination
- Easy to read, digital display
- Measuring range: 5 55 mmHg
- Long battery life
- Maintenance-free
- Small size, weight 71 g
- Includes 150 protective tip covers (OCU-FILM® +)

173600



Ocu-Film® + Tip Covers

- Minimises the risk of cross-contamination
- 150 per pack







TONOVET PLUS TONOMETER

The Icare® TONOVET Plus is easy to use. It features an advanced user interface with a clear, large display. Red/green positioning lights help to find the correct angle and aim at the middle of the cornea. The automatic measuring sequence lets you choose between taking single readings or taking all 6 measurements with one press of the button.

- Quick, painless and accurate procedure •
- Easy to use and requires no calibration Þ
- Assisting positioning lights
- Large and easy to read colour display
- Þ Dimensions (in mm): L 215 x W 24-29 x D 35-95
- Weight: 230 g (incl. batteries)
- Includes: Transport Case, 100 Probes, 4x AA batteries

1736007





OR code for the application video of the TONOVET Plus

ICARE® TONOVET TONOMETER

The TONOVET is based on a rebound measuring principle, in which a light probe is used to make momentary, gentle contact with the cornea. The device is easy to use and the measurement is barely noticed by the animal and often does not even cause corneal reflex.

Eye pressure should be measured from:

- Young patients to establish baseline readings
- Patients older than 6 to 7 years ▶
- Patients predisposed to glaucoma (42 canine breeds)
- Ocular examination patients
- Head or eye trauma patients
- The treatment of the patient is well tolerated with the absence of local anesthesia
- Quick, painless and accurate procedure
- Self-calibrating
- Portable as it is powered by batteries Þ

Technical specifications

- Display range: 0–99 mmHg
- Power: 4 x AA batteries included
- Dimensions (in cm): L 3.2 x W 24 x H 8
- Weight: 250 g (including batteries)
- Includes 100 TONOVET probes

1736005



Stand for For TONOVET and **TONOVET Plus**

Table and wall mountable

1736008



Meie

e-pood www.vetpood.ee

1736008

1736007

Stand for For TONOVET and TONOVET Plus

Table and wall mountable

1736008





Application

HEINE® OMEGA 600 INDIRECT OPHTHALMOSCOPE

Discover more. With less weight.

Lighter. Brighter. Better. HEINE® kept the best and perfected the rest. Highly comfortable, the HEINE® OMEGA 600 delivers a new class of technological innovation, along with the new and unique visionBOOST for significantly better diagnostic even in dense cataracts.

- Most precise diagnostic, up to the far retinal periphery
- Up to 20 % better view in media opacities with visionBOOST
- Lightest High-End Indirect Ophthalmoscope worldwide
- Long-lasting investment due to its robust design
- Easy disinfection thanks to smoothSURFACE

Most precise diagnostic, up to the far retinal periphery

- Significantly better diagnostic due to unique visionBOOST
- Sharpest fundus image due to superior glass optics
- Brightest fundus image with true colour rendering thanks to our unique LEDHQ – now in even more natural colours
- Best 3D imaging due to our unique Stereoscopic Adjustment
- Fechnology in dilated and undilated pupils

Includes

OMEGA 600 Indirect Ophthalmoscope (with battery and +2 D eyepiece), E4-USBC power supply with cable, eyepiece 0 D

173497





HEINE® ML4 LED HEADLIGHT WITH 3.5X / 4.0X BINOCULAR LOUPES

Perfect fit. Perfect view. Even with during operations.

The HEINE® ML4 LED HeadLight is specially designed for healthcare professionals who need a perfect view during long surgical operations or treatments. Various individual adjustment options of the headband and the comfortable leather finish guarantee the highest level of comfort and a secure fit.

HEINE® ML4 LED HeadLight with mPack UNPLUGGED

- Lightweight, high-performance Battery integrated on the back of the headband
- Offers 100 % freedom of movement
- Includes Plug-in Transformer UNPLUGGED

311138



HEINE[®] HR / HRP Binocular Loupes

With i-View loupe holder

420 mm working distance

- Includes Protective Glasses, 2 Sterlisable Swivel Levers, Retaining Strap, Cleaning Fluid, Cleaning Cloth and Case
- 3.5x magnification
- 4x magnification
- 340 mm working distance

311123

311122



Eickemeyer

CLEARVIEW® 2 RETINAL CAMERA

The Optibrand[®] ClearView[®] 2 Retinal Camera is an ophthalmic camera device developed for veterinary professionals to acquire wide-angle digital colour images of the retina using an Apple iPod touch®.

- Autofocus
- Automatic- and manual-capture image modes
- Automatically saves images •
- Retina images can be immediately viewed and uploaded to e-mail or text message
- Data transfer to a PC/MAC via iTunes®

Technical specifications

- Pupil size 5 mm diameter or greater
- Field of view: 50° static, up to 80° dynamic view of peripheral retina
- Working distance: 50 mm
- Illumination white light LED provided by iPod touch®
- Diopter power: -20 D to +20 D autofocus accommodation
- Image size: 1,920 x 1,920 or roughly 3.5 megapixels
- Image format: JPEG
- Battery life: up to 50 sessions (2 min) on a full charge
- Software ClearView[®] 2 from the App Store[®]

173553

€2300,-

RETEVET™ PORTABLE ERG

The RETevet[™] portable ERG offers an intuitive interface that allows veterinary ophthalmologists and researchers to perform electroretinograms (ERGs) to measure the retinal function of animals.

- Small, portable and battery powered
- Intuitive user interface
- Real-time results
- All flashes electronically controlled
- Easy USB connection to any PC
- Comprehensive reports in PDF formats
- Anaesthesia is optional (based on the patient)

Technical specifications

- RGB LED technology
- 15 million colour combinations ►
- Dimensions (in cm): W 10.5 x H 15.5
- Weight: 240 g
- Includes: RETevet[™] Device, Docking Station, 6 Jet Electrodes, 10 Needle Electrodes, Dust Cover, 3-Plug Electrode Lead, USB Cable, Power Adapter.

173610





incl. iPod touch®







KOWA SL-17 PORTABLE SLIT LAMP

The KOWA SL-17 Slit Lamp provides optimum stereoscopic observation with selectable magnifications and slit widths within a compact, lightweight, portable unit. With its non-slip ergonomic grip, the SL-17 provides maximum operator comfort during lengthy examinations.

- Ergonomic and lightweight only 790 g
- Continuously variable LED illumination from 10 K to 20 K lux
- Choice of 10x and 16x magnifications
- 4 slit widths: 0.1 mm, 0.2 mm, 0.8 mm and Ø 12 mm
- Spot illumination: Ø 1 mm, Ø 5 mm, Ø 12 mm
- 1 mm slit length for observing the anterior chamber flare
- Built-in cobalt blue filter
- Standard AAA batteries for up to 280 minutes operation

Technical specifications

- Interior angle: 13°
- Working distance: approx. 80 mm (at 16x magnification), approx. 100 mm (at 10x magnification)
- Field of view: Ø 10 mm (at 16x magnification),
 Ø 15 mm (at 10x magnification)
- Viewing distance: 50 to 72 mm
- Eyepiece dioptric adjustment: -8 to +5 D
- Slit projection angle: horizontal: ±60°
- Power input: DC 4.8 6.4 V (4x AAA batteries)
- Dimensions (in cm): W 22 x D 9.5 x H 22.5
- Weight: 790 g (incl. batteries)

White	Pink	Aqua Blue	Green
173660	17366001	17366002	17366003





KOWA SL-17 Portable Slit Lamp Case

- Aluminium construction
- Foam padding
- Dimensions (in cm): L 41 x W 34 x H 12

173661



USB Battery Charger for KOWA SL-17

Incl. 4 rechargeable batteries

173662



USB Battery Charger free of charge with every order





173661









17366002

INTENSIVE CARE UNIT FOR SMALL ANIMALS

The Vetario T30 unit is an advanced, compact Intensive Care Unit capable of delivering small animal patient warming and recovery. It features full digital temperature control and early warning alarms. the Vetario T30 is ideal for young, sick, injured or weak animals in emergency situations or animal rescue. Its small profile makes it usable in a variety of veterinary settings, from pre-examination warming in consulting rooms, to use in patient homes or mobile ambulances.

- Digital temperature control, programmable to 0.1 °C
- Digital temperature reading choose °C or °F
- High and low, internal and external temperature alarms
- Clear, high visibility locking door
- Adjustable ventilation
- Easy to dismantle for thorough cleaning
- Made of antimicrobial plastic
- Built-in carrying handle
- ▶ 12 V power supply for optional in-car adapter
- Stackable with no assembly required
- Base area: 240 x 240 mm
- Total volume: 9.5 liters
- Dimensions (in mm): W 270 x H 297 x D 275

219036



Car adapter for Vetario T30

- For the safe transportation of patients
- Can be connected to the cigarette lighter

21903601





Meie

e-pood

219036

INTENSIVE CARE UNIT FOR SMALL ANIMALS

Ideal for the postoperative placement of the patients to reduce the risk of hypothermia, shock, etc. The cages offer a comfortable, warm and hygienic environment. The temperature is automatically kept constant by a controller and displayed on the display.

- The chamber size is suitable for small animals, such as rodents, birds, kittens and small puppies
- Lifetime calibrated digital temperature control
- Fan ventilation
- Nebuliser connection
- Filter for removal of harmful bacteria and fungi
- A water reservoir for humidity levels reduces the risk of dehydration
- Easy to clean and disinfect

Intensive Care Unit Vetario T40M

- Small
- Dimensions (in cm): L 48.5 x W 38.5 x H 48

219031





- Large
- Dimensions (in cm):
- L 69 x W 49 x H 56







EICKVIEW PORTABLE LED VIDEO ENDOSCOPES

Due to their extremely compact dimensions, the EickView LED Video Endoscopes are the perfect solution for broncho-, gastro-, rhino-, tracheo, uretero- and vaginoscopy in dogs and cats and for the examination of the upper respiratory tract in horses. The devices work independently, as the powerful LED light source and the high resolution camera of the stand-alone systems are integrated in the distal end of the endoscopes. In addition, the folding 3.5" monitor allows both direct video and image playback as well as storage via SD card. Furthermore the EickView LED Video Endoscopes can be connected to a separate monitor.

- Folding 3.5" monitor for video and picture playback
- Recording and archiving on integrated SD card
- File formats: JPG, AVI
- Integrated powerful LED light source
- Rechargeable Battery with up to 3 hours of operation
- USB port and video out
- Depth of field: 5 60 mm
- Direction of view: 0°
- Field of view: 110°

EickView L	EickView LED Video Endoscopes						
ltem No.	Description	Working length	Outer Ø	Working channel	Deflection		€
306009	EickView 60S	60 cm	3.3 mm	1.2 mm	up 180° down 130°		4 800,-
306011	EickView 60	60 cm	4.2 mm	1.3 mm	up 180° down 130°		4 800,-
306010	EickView 70	70 cm	6.0 mm	2.0 mm	up 180° down 130°		4 800,-
306166	EickView 100E	100 cm	8.0 mm	2.8 mm	up 150° down 130°		4 600,-
306164	EickView 150E	150 cm	8.0 mm	2.8 mm	up 130° down 130°		4 600,-

Accessories				
ltem No.	Description	Diameter	Length	€
306211	Alligator Forceps, EickView 60/60S	1.0 mm	120 cm	 359,
306311	Biopsy Forceps, EickView 60/60S	1.0 mm	120 cm	 359,
306214	Alligator Forceps, EickView 70	1.8 mm	120 cm	 250,-
306314	Biopsy Forceps, EickView 70	1.8 mm	120 cm	 250,
306216	Alligator Forceps, EickView 100E/150E	2.4 mm	230 cm	 250,
306316	Biopsy Forceps, EickView 150E	2.4 mm	230 cm	 250,-



306214



306314



306009

Eickemeyer

You can now combine the new EickView HD Video Endoscope System according to your wishes and requirements.

EickView HD Video Processor

The EickView HD Video Processor is the central hub of your video endoscope system. The powerful LED light source enables optimal illumination in any position. Various settings on the video processor allow you to adapt the image quality to your needs. The new HbE mode enables an improved display of vessels. Still images can easily be saved directly to a USB storage medium. The image data can be transferred to an existing PC or Laptop.

306167



EickView PRO HD Upgrade

The EickView PRO HD Upgrade turns the HD Video Processor into a stand-alone and mobile

306167

endoscopy unit. Furthermore it opens access to other endoscopic disciplines such as arthroscopy, rhinoscopy, otoscopy, etc. The foldable and rotatable Full HD Touch Screen Tablet provides greater functionality because the tablet can not only be used to view images and videos but also for recording, storage and editing. Keyboard is available as an option.

Meie

e-pood

30616701

306168






EickView HD Video Endoscopes

Due to further improved video chips, the EickView HD Video Endoscopes deliver even more brilliant images. The main areas of application are bronchoscopy and gastroscopy. Due to the large number of available scope sizes, they are suitable for all applications in small animals and equine.

Technical specifications

- Viewing direction: 0°
- Distal end contains 1 CMOS camera chip, 2 light guides, working channel, lens rinsing nozzle
- Scope of delivery: EickView video endoscope, pressure tester, 2 cleaning brushes, cleaning set, carrying case

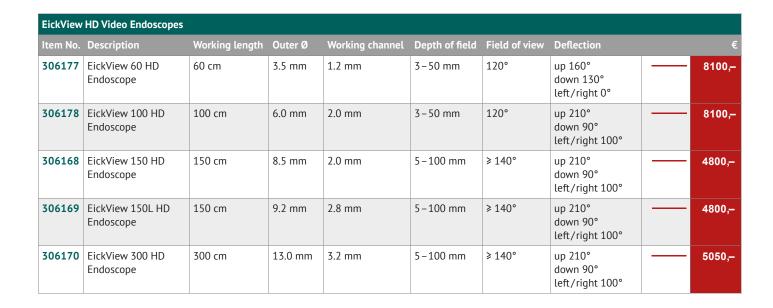

BASIC LAPAROSCOPY SET

The 24-piece Laparoscopy Starter Set provides the ideal foundation for starting laparoscopy.

Complete set, consisting of:

- 30° Laparoscopy Endoscope, L 30 cm
- 2x Laparoscopy Cannulas (L 9.5 cm / 10.1 cm)
- 2x Laparoscopy Safety Trocars (L 16 cm / 17 cm)
- Laparoscopy Cannula Snap Reducer Adapter
- LED light source LED 2,500
- Universal Fibre Optic Cable, L 1.8 m
- Endoscope EICKEMEYER® / STORZ Adapter
- Light Source EICKEMEYER® / STORZ Adapter
- Desktop PC
- EickCam HG USB-Camera, inkl. Camera Zoom Adapter
- EickTron 160
- EickTron Bipolar Adapter
- Monopolar METZENBAUM Scissors, L 36 cm
- Monopolar Universal Forceps
- Monopolar Instrument Cable, L 3.5 m
- Bipolar Coagulation Forceps, L 32 cm
- Bipolar Instrument Cable, L 3 m
- Veress Insufflation Cannula, L 10 cm
- CO₂ Insufflator
- Endoscopy Trolley

306030



LAPAROSCOPY SPAY INSTRUMENT SET - 2 PORT

The 24-piece set is designed with our most popular laparoscopic instruments for a two port approach to the abdomen.

Complete set, consisting of:

- > 30° Laparoscopy Endoscope, L 30 cm
- > 2x Laparoscopy Cannulas (L 9.5 cm / 10.1 cm)
- > 2x Laparoscopy Safety Trocars (L 16 cm / 17 cm)
- Laparoscopy Cannula Snap Reducer Adapter
- LED light source LED 2,500
- Universal Fibre Optic Cable, L 1.8 m
- Endoscope EICKEMEYER® / STORZ Adapter
- Light Source EICKEMEYER® / STORZ Adapter
- Desktop PC
- EickCam HG USB-Camera, inkl. Camera Zoom Adapter
- CO₂ Insufflator
- Veress Insufflation Cannula, L 10 cm
- Monopolar Universal Forceps
- Bipolar Coagulation-Cutting Forceps EickCut, L 32 cm
- Bipolar Coagulation-Cutting Forceps Blades
- Bipolar Instrument Cable, L 3 m
- EickTron 160
- EickTron Bipolar Adapter
- EickTron Bipolar Forceps Cable
- Endoscopy Trolley (not illustrated)

306031





EICKEMEYER® LAPAROSCOPY POSITIONER

The EICKEMEYER[®] Laparoscopic Positioner enables greater visualization as the patient can be rotated. The rotation helps major abdominal organs to fall away from the body wall, leaving the ovary in plain view and ready for removal.

- Tilt and secure patient in different steps both left and right
- Easy assembly and disassembly
- Easy to clean

For Dogs

- Dimensions (in cm):
 - L 136 (incl. head extension) x W 42 x H 33.5

305100



For Cats

- Features ability to tilt at a greater angle for small patients
- Dimensions (in cm): L 73 x W 28.5 x H 23

305110







EICKEMEYER® LAPAROSCOPY TRAINER

The EICKEMEYER[®] laparoscopy trainer is ideally suited to help beginners in the field of laparoscopy get started with this surgical technique. By using the trainer, routine orientation in threedimensional space and working with various instruments can be achieved in a safe environment. In addition, knotting techniques and communication with the OR team can be practiced.

The EICKEMEYER® laparoscopy trainer was designed exclusively for the use of non-organic materials. When using fabric, the white training insert must be replaced with a suitable pad. **306000**





Meie e-pood

Eickemeyer

ULTRASONIC CLEANER

Ultrasonic Cleaner with stainless steel oscillating tank and stainless steel case for simple and safe instrument cleaning and perfect cleaning results.

- ▶ Timed (1–60 mins) and continuous operation
- Adjustable heating: 20-80 °C
- Operating frequency: 45 kHz
- Power supply: 50/60 Hz, 220 240 V
- Maintenance Free
- Includes: Stainless steel lid & perforated tray





.....

THERMOCULT INCUBATOR

- Handy and inexpensive incubator for multi-purpose laboratory use (e.g. warming glassware)
- The incubator can be placed on work benches or underneath cabinets
- Integrated thermometer control
- Dimensions (in cm): L 30 x W 17 x H 15
- Interior dimensions (in cm): L 21 x W 14.5 x H 11
- Weight: Approx. 1.3 kg
- Temperature stability: 35 ± 2 °C
- Shelf not included

732590



Thermocult Incubator Shelf





ENBIO S B-CLASS AUTOCLAVE

Simple - reliable - fast

The Enbio S is the fastest B-class autoclave on the market. Thanks to its compact size, it fits into every practice and the sterilisation chamber offers enough space for a standard surgical kit. The Enbio S is set up in no time and it is simple and intuitive to use - switch it on, select the mode, sterilise - done!

- Extremely short program times of only 7 to 15 minutes
- Þ Revolutionary low operating costs thanks to Magic Filter
- Very quiet operating noise of only 32 dBA
- Automatic documentation on USB stick
- Highest quality at a low price
- External dimensions (in mm): W 252 x H 162 x D 561
- Weight: 15 kg

500000










EICKEMEYER® PC-ECG

All algorithms of the EICKEMEYER® PC-ECG are specifcally developed for veterinary medecine which allows for reliable and fully automatic measurements.

- 6 Channel ECG
- Continuous patient ECG for 1 hour
- Electronic storage of ECGs allows direct access to patient data
- Results are displayed on-screen for quick assessment
- ECG can be sent via email
- USB-Version Easy to connect and install
- System requirements: PC running Windows® 98 or higher
- Includes: 5 Lead patient cable, alligator clips
- Monitor not included ►

321018



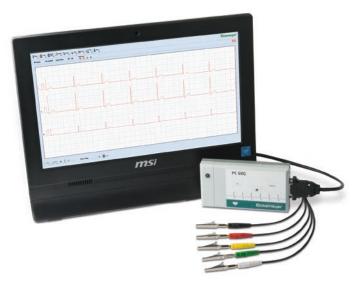

.....


DISPOSABLE RING RETRACTOR WITH ELASTIC HOOKS

A ring retractor facilitates access to the surgical field during various soft tissue surgery procedures.

- Four hinges allow adaptation to the body shape
- Makes an area of 14.4 x 14.4 cm
- Incl. 8 elastic hooks (sharp)
- Packaged sterile

162150



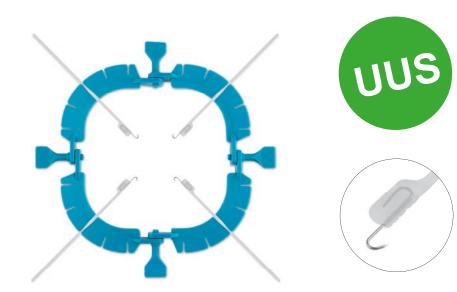

AESCULAP ISIS / EXACTA CAT CLIPPER

The AESCULAP Isis cordless clipper is ideal for preparation for small areas (forelimb, head and neck) when taking bloods, biopsy or for hard-to-reach areas.

- Cutting width: 24 mm
- Cutting length: 0.5 mm
- Li-ion battery: runtime up to 120 min with approx. 90 min charging time
- Charge indicator via charging station
- Weight: 120 g (incl. battery & blade)
- Includes: clipper, blade (carbon blade cannot be sharpended), charging station, attachment comb (adjustable to 4 different cutting lengths, 3 – 6 mm), brush, AESCULAP oil, instructions

902605



AESCULAP Isis / Exacta Clipper Blade

Carbon blades (can not be resharpened)

902601





EICKEMEYER® LED 4 EXAMINATION LIGHT

Modern examination light for the practice with energy-saving LED technology. With an illuminance of approx. 50,000 lux at a working distance of 30 cm, the EICKEMEYER® LED 4 examination light offers optimal illumination for a professional examination.

Technical specifications

- ▶ 15 V/11.25 W LED lamp with 4 high-performance LEDs
- Illuminance: approx. 50,000 lux/30 cm distance
- Aluminium light head for optimal heat convection and heat radiation
- Lifespan: approx. 50,000 hours
- Colour temperature: approx. 4,200 kelvin
- Gooseneck construction with 90 cm long arm (arm remains in the desired position)
- Maximum examination height: 165 cm
- Stable, tilt-proof mobile stand (5-foot stand) made of powder-coated metal

611111





Meie

e-pood

CO₂ LASER

The gentle, stress-free and side-effect-free effect of the CO_2 laser beam not only relieves the patient, but also contributes to faster convalescence and less aftercare and rehabilitation. The laser is suitable as a so-called laser scalpel with a focused beam and for superficial vaporisation with a defocused beam.

Since the CO_2 radiation emits its own energy in the upper tissue layers, trauma to deeper tissue is excluded.

- Operate with minimal bleeding
- Less per- and post-operative pain
- Reduced risk of infection
- Faster wound healing
- Contactless cutting
- Small cutting width
- Precise cut
- Absolute sterility
- Less post-operative complications
- Program presets especially for veterinary medicine
- Powerful: 15 watts
- Wavelength: 10.6 µm
- Device dimensions (in cm): H 96 x W 34 x D 46
- Weight: approx. 46 kg





Hinnad ilma käibemaksuta! Kampaania kestab 30/03 / 2022 - 30 / 06 / 2022 Transporditasu alla 150 eur tellimustele 8,00 EUR.

EICKTRON ELECTROSURGICAL UNIT

The EickTron is a versatile tool in veterinary medicine allowing it to be used for both monopolar and bipolar instruments. The unit's power adjustment via a foot or hand switch and its microprocessor control makes it very easy to use.

Includes

- Handpiece with finger switch and connecting cable
- Electrode set (10 pieces)
- Neutral electrode incl. cable
- Footswitch ▶

Technical specifications

- Input: 220-240 V, 50-60 Hz
- Power consumption: 300 VA
- Frequency: 600 kHz
- Dimensions (in mm):
- L 288 x W 254 x H 104

323135



323135

Autoclavable Accessories

Bipolar Forceps Angled Length: 150 mm 323105

Bipolar Adapter

323139

Bipolar Forceps Cable 323106



EICKTRON 4.0 RADIOSURGERY UNIT

The EickTron 4.0 is a high-frequency radiosurgery unit that can be used in many ways in veterinary medicine. The working frequency is 600 KHz – 4.0 MHz and the output can be easily regulated using the foot pedal or hand switch. The digital display of the power output and the microprocessor-controlled monitoring of the operating functions guarantee absolute reliability and simple operation. The connection of the neutral electrode is constantly monitored for safety.

Radiosurgery units represent the minimally invasive form of electrosurgery, as the radio frequency generators work with significantly higher frequencies - here up to 4.0 MHz! Thanks to the high frequency, fewer watts can be used, which means that there is far less thermal damage to the surrounding tissue.

Complete with

- Handpiece with finger switch and connection cable
- Set of electrodes (10 pieces)
- Each 2 needle, knife and ball electrodes ►
- Neutral and rectal electrode
- Cable for neutral electrode
- Foot switch





323105

Power

- Max. Output 150 W (cutting)
- Max. Output 100 W (blend)
- Max. Output 100 W (enhanced)
- Max. Output 100 W (coagulate)
- Max. Output 100 W (gently coagulate)
- Max. Output 60 W (bipolar coagulation)

Technical specifications

- Power consumption: 350 VA
- Frequency: 600 KHz 4.0 MHz
- Dimensions (in cm): H 14.4 x W 37 x D 31.9

323400

Bipolar Forceps

- Angled
- Length: 150 mm

323105

Bipolar Forceps Cable 323106



