veterinary technology for life Eickemeyees

www.vetpood.ee tartu@estdoma.ee 7362 716

Sügiskampaania 2023

Kehtib 01 / 10 / 2023 – 31 / 01 / 2024 Kataloogis on hinnad käibemaksuta!



LIFEVET PT PULSE OXIMETER WITH TEMPERATURE MEASUREMENT

The portable LifeVet PT can measure and display the functional oxygen saturation of arterial haemoglobin (SpO₂), pulse rate and body temperature in real time in dogs, cats, and horses. All important parameter information can be easily read on the large LCD display.

- Small, handy and sturdy
- Immediately ready for use no calibration necessary
- Display of oxygen saturation from 35 to 100 %
- Display of the pulse rate from 25 to 400 beats per minute (bpm)
- Display of body temperature from 18 to 45 °C
- Alarm limits (optical & acoustic) individually adjustable
- 2.8" TFT LCD colour display with battery level indicator
- Can be connected to a computer via USB
- Test results can be stored for up to 360 hours
- Dimensions (in cm): H 14.2 x W 7.8 x D 2.8
- Weight: 250 g (device only)

Incl. SpO_2 sensor with two sensor clips (large & small), temperature probe, universal charger, USB cable, Li-Ion battery, protective silicone case and holder for tabletop use.

321860



ature

LIFEVET CP CAPNOGRAPH AND PULSE OXIMETER

The LifeVet CP handheld Capnograph and Pulse Oximeter measures and displays the expiratory CO_2 concentration as well as the respiratory rate, pulse rate and oxygen saturation in dogs, cats and horses. This compact and portable device is very easy to use with its touchscreen display and intuitive interface.

- High resolution 4.3" touchscreen display
- Side-stream capnography
- EtCO₂ concentration: 0 150 mmHg
- Respiratory rate displayed in rpm
- SpO₂ range: 1 100 %
- Pulse rate: 25 250 bpm
- Audible and visual alarms with adjustable volume
- Long-life lithium battery: up to 18 h operating time
- Dimensions (in cm): W 7.7 x H 14.1 x D 3.6
- Weight: 420 g

Includes: CO_2 tube, CO_2 fi lter, net adapter, USB cable, clip sensor







IFEVET 10M MULTIPARAMETER MONITOR

The LifeVet 10M is a fast, accurate and comfortable patient monitor that is characterised by its high ease of use and reliable technology. Its innovative technology is the ideal basis for obtaining detailed data and enabling firstclass visualisations. Thanks to the large display, the vital functions can also be easily read from a distance. It is operated conveniently via touchscreen. Hot keys also provide quick access to the most important functions. The low

- Multi-parameter display of respiratory rate, pulse rate, oxygen saturation, blood pressure (NIBP), ECG and temperature
- High-resolution 10.4" LED touchscreen with up to 7 curves
- Freely selectable alarm limits

power consumption and powerful battery make this

monitor an extremely efficient solution.

- Mains and battery operation up to 4 hours
- Dimensions (in cm): W 32 x H 22 x D 16
- Weight: approx 3.5 kg

Incl. Li-Ion battery, NIBP cable with cuff, ECG cable with clamps, SpO_2 sensor with clips and temperature probe

321915



that are characterised by their high level of user-friendliness, reliable technology and extensive data storage. Thanks to the large display,

the vital functions can also be read easily from a distance. It is operated conveniently via touchscreen. Hot keys also provide quick access to the most important functions.

LIFEVET 10C MULTIPARAMETER MONITORS

The LifeVet 10C monitors are modern, powerful patient monitors

- Multi-parameter display of respiratory rate, pulse rate, oxygen saturation, blood pressure (NIBP), ECG, temperature and capnography (EtCO₂) in sidestream mode
- High-resolution 10" LED touchscreen with up to 8 curves
- Freely selectable alarm limits and 360° visible alarm display
- Mains and battery operation up to 4 hours
- Dimensions (in cm): W 27 x H 22 x D 17
- Weight: ≤ 4.0 kg

Incl. Li-Ion battery, NIBP cable with cuff, ECG cable with clamps, SpO_2 sensor with clips, temperature probe, CO_2 adapter, CO_2 cable and water trap

LifeVet 10C	LifeVet 10C+
321920	321921





321921





Eickemeyer

€ 2220

EICKEMEYER® NARKOVET LIGHT ANAESTHETIC UNIT

The EICKEMEYER® NarkoVet LIGHT is a cost-effective mobile anaesthetic machine, using quality parts like the MSS Vaporiser.

It includes breathing circuits and an anaesthetic gas filter.

- High accuracy Rotameter (0.1 5.0 l/min) EICKEMEYER[®] Isoflurane Vaporiser TEC 3
- Oxygen bypass (O₂ flush) .
- Patient exit: Ø outside: 22 mm / Ø inside: 15 mm
- Ayre's T-Piece breathing circuit for patients under 7 kg
- Semi disposable Circle Circuit for patients over 7 kg including patient hose with Y-piece, 2.0 l rebreathing bag and APL pressure relief valve
- EickSorber anesthetic gas filter with holder and exhaust pipe
- Storage tray and hook for additional rebreathing bags
- Stable base with 5 castors (Ø 54 cm)
- Dimensions (in cm): H 142 x W 67 x D 54
- Weight: 14.5 kg

213071



OxyVet IV Oxygen Concentrator

- Saving costs and effort: No oxygen bottle required, lower power consumption
- Simple operation thanks to the clear arrangement of the setting functions and monitoring information
- High patient safety through visual and
- acoustic alarms
- Noise level: ≤ 55 dbA
- Flow rate continuously adjustable from 0.5 – 5 l/min
- Output of up to 93 % oxygen (± 3 %)
- Dimensions (in cm): L 34 x W 37 x H 67
- Weight: 15.3 kg
- Incl. Bubble humidifier and O₂ hose
- 1 year warranty

213180





213180

Starter Kit for NarkoVet LIGHT

This set provides the necessary accessories to perform anaesthesia on dogs and cats.

Complete Set, consisting of:

- Isoflurane Safety Key Filler •
- Soda Lime Anaesthesia, 5 l, with colour indicator 2 Rebreathing Bags (1 and 3 l) 6 Anaesthesia Masks (size 1 6)
- •
- •
- EickTube Tracheal Tube Set with 23 tubes (2.0 10.0 mm)
- Laryngoscope Basic

213079





The EICKEMEYER® NarkoVet Anaesthetic Unit is now even more flexible: Can be set up as a desk, wall or stand model.

Table mounted Model

- High accuracy Rotameter (0.1 5.0 l/min)
- EIČKEMEYER[®] Isoflurane Vaporiser TEC 3
- Oxygen bypass (O₂ fl ush)
- System pressure gauge
- Infinitely adjustable pressure relief valve
- Soda Lime canister and accessories
- Suitable for small animals up to 80 kg
- Dimensions (in cm): L 32 x W 25 x H 51

213062



EickSorber Anaesthetic Gas Absorber Scavenging System Hose, 2 m, transparent

NarkoVetAnaesthetic Starter Kit

Complete Set, consisting of:

- 3 Soda Lime Anaesthesia, 5 l, with colour indicator
- 2 Rebreathing Bags (1 and 3 l)

Isoflurane Safety Key Filler

- 6 Anaesthesia Masks (size 1 6)
- EickTube Tracheal Tube Set with 23 tubes (2.0 – 10.0 mm)
- Laryngoscope Basic

213061




21309902

OxyVet III Oxygen Concentrator (5 l)

An oxygen concentrator draws in room air, separates the oxygen from other gases in the environment and delivers the oxygen at high concentrations.

- Flowrate: 0.5 to 5 l/min •
- Oxygen concentration: 93 % ± 3 % •
- Sound level: 40 dbA (50 Hz) .
- Electrical requirements: 230 V / 50 Hz
- Power consumption: approx 290 watt @ 2 l/min and approx. 312 watt at 5 l/min
- Dimensions (in cm): L 34 x W 30.4 x H 62
- Weight: 16.3 kg
- 3 Year Warranty

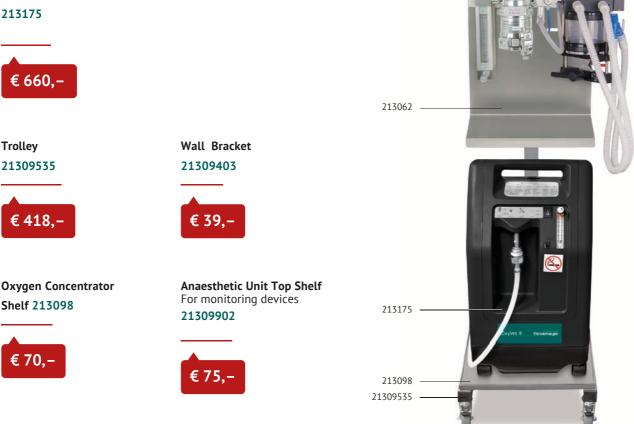

The EICKEMEYER[®] InfusoVet SP is a highly accurate and reliable syringe pump. The clearly arranged, colour coded buttons make it particularly easy to use.

- 2.5" backlit LCD display
- Compatible with standard 5, 10, 20, 30, 50 and 60 • ml syringes
- Safety when injecting: precise control of flow rate and injection volume
- High patient safety through acoustic alarms
- Ouick start function
- With clamp for IV pole

Technical specifications

- Mains and battery operation, battery life up to 6 hours
- Splash proof (IP34) .
- Dimensions (in cm): L 33 x D 12.6 x H 11
- Weight: approx 1.8 kg





EICKEMEYER[®] I.V. FLUID WARMER

For warming up all intravenously administered liquids. LED display with temperature display. Temperature control from 35 to 42 °C in 0.1 °C steps. Warm-up time: less than 2 min. Dimensions (in cm): L 18 x W 7 x D 3.5. Weight: 200 g (without mounting clamp).

402092



I.V. GIVING SET

- Pressure / gravity infusion.
- Individually packaged sterile sets.
- DEHP & Latex free.
- Compatible with infusion pump InfusoVet, InfusoVet Easy II,
- InfusoVet Connect and InfusoVet IP.

Please note: If you use a pump that is not from EICKEMEYER®, your pump for this infusion set must be calibrated accordingly.

Pack of 100 pieces. Extension 050166 is compatible with this giving set.

402071









INFUSOVET CONNECT INFUSION PUMP



- 4.3" color touchscreen for easy operation
- Adjustable audible and visual alarms
- Suitable for bloods
- Flow rate: 0.1 2,000 ml/h
- Bolus rate: 0.1 2,000 ml/h (automatic and manual)
- Occlusion level: 5 levels selectable (50 900 mmHg)
- Mains and battery powered (up to 10 h) •
- With clamp for IV pole and cage holder
- For EICKEMEYER[®] infusion sets (item no. 402071)
- Dimensions (in cm): W 13.8 x H 13.2 x D 9
- Weight: 1.5 kg

402090





INFUSOVET IP INFUSION PUMP

The EICKEMEYER® InfusoVet IP is a programmable infusion pump that combines safety, performance and reliability. The pump is easy to use and the infusion sets are easy to insert.

- 2.5" backlit LCD display ٠
- User-friendly through simple programming
- High level of patient safety thanks to acoustic and . visual alarms (in the event of air bubbles,
- constipation, empty battery, end of infusion) Also suitable for blood transfusions
- With clamp for IV pole
- For EICKEMEYER[®] infusion lines (item no. 402071)

Technical specifications

- Flow rate: 0.1 1,500 ml/h Volume limit: 1 9,999 ml

- Bolus rate: 0.2 600 ml/h (manual) Occlusion level: 3 levels selectable (150 900 • mmHg)
- Mains and battery operation, battery life up to 4 hours
- Splash water protection according to IP34
- Dimensions (in cm): W 15 x H 25 x D 9 Weight: < 1.45 kg





X-BASE OPERATING TABLE

The EICKEMEYER® X-Base Operating Table is our most popular surgery table. All components are of the highest quality, making this table a great investment in the future of your practice.

- X-Base with 4 individually adjustable feet
- Provides best possible legroom and stability
- Good working posture whether sitting or standing
- Slim lift column made of aluminium, pump hydraulic
- or mains operated
- Self-contained, maintenance-free lift column
- Height adjustable from 72 112 cm
- Unidirectional 90° tilt mechanism, one hand control
- Stainless steel top with rounded, anti-drip edges and
- drain hole
- Two tabletop widths: 50 cm and 60 cm
- Optional heated tabletop
- Various colour options available

Illustration	RAL No.	Colour Electric Hydraulic				
			50 x 130	60 x 130	50 x 130	60 x 130
		Stainless Steel	602012	602010	602022	602020
	3000	Flame Red	601500	601507	601470	601477
	6018	Lime Green	601501	601508	601471	601478
	5022	Night Blue	601502	601509	601472	601479
	2001	Red Orange	601503	601510	601473	601480
	6005	Moss Green	601504	601511	601474	601481
	4010	Pink	601505	601512	601475	601482

Each

€ 2100,-

Table Tie Down Cleats

Stainless steel construction Mounted under the table 602005

002005



Standard Rail System

Enables quick, safe and variable fi xing of the patients on the table.

Consisting of:

- 2x Standard Rails, side
- 2x Standard Rails, end
- 4x Tie Down Cleats, quick release
- 10x Tie Down Ropes, L 1 m

605050



Curved Dental Tray

- With removable tray with grid
- Tray size (in cm): W 50 x D 35





The EICKEMEYER[®] V-Top Table features two stainless steel table panels which can be positioned independently to create the angle that holds the animal just right for all kinds of procedures. It also features an easy to clean removable gutter with a drain.

Technical specifications

- Adjustable top panels: 0 90°
- Stainless steel construction •
- Unidirectional 75° tilt mechanism •
- Adjustable height: 72 to 112 cm
- 4 Individually adjustable feet
- 3 Year Warranty
- Tabletop dimensions (in cm): L 140 x W 50

Electric-lift Mechanism	Hydraulic-lift Mechanism
602060	602070





Curved Dental Tray

- With removable tray with grid
- Tub size (in cm): W 50 x D 35 •

602065





MOBILE OPERATING TABLE X-BASE

The best selling EICKEMEYER® X-base operating and treatment tables are now available in a mobile version. Equipped with either maintenance-free, smooth-running pump hydraulics or a quiet, battery-operated electric motor with manual transmission, the table sets new standards in mobility and stability.

- Slim, attractive hydraulic lifting column made of . anodized aluminium
- Height adjustable from 72 112 cm allows comfortable treatment or surgery, sitting or standing
- X-shaped substructure made of high-quality stainless steel and four smooth-running, braked double castors
- Tabletop tiltable up to 90°, easily adjustable with one hand
- With rounded corners, anti-drip edges and a drain hole
- Easy to clean and disinfect
- With smooth foot pump

50 x 130 cm	60 x 130 cm
601420	601430

601420

Each





LOW LIFT SCISSOR TABLE II

The EICKEMEYER[®] Low Lift Scissor Table II is perfect for lifting and transporting larger patients without unnecessary handling and movement. The basic stationary table is available in eight different colors and the additional options available make this table a real all-rounder for your practice.

- Ideal for examination, prep, dental treatment and procedures
- Minimum height of 28 cm allows large dogs to walk onto
- the table
- Maximum height of 105 cm allows you to examine smaller
- patients without having to hunch and lean forward
- All parts made from high quality German stainless steel
- Smooth, polished tabletop (60 x 130 cm) with rounded
- corners, anti-drip edges and a drain hole
- Silent electric operation via foot pedal
- Includes power supply and tie down cleats

Variations Illustration RAL No. Colour Item No Stainless Steel 604200 Flame Red 604201 3000 Lime Green 604202 6018 604203 Night Blue 5022 2001 Red Orange 604204 Moss Green 604205 6005 4010 Pink 604206 Pure White 604207 9010

Stainless Steel





Colour

Additional Options

In addition to the stationary table, you can choose one or more of the following table options:

Battery Kit

Includes Battery and Charger 604307



Mobile Kit Includes Wheels, Battery and Charger 604306



Electric Tilt Option For tabletops 604301



Integrated Scale Option Weighing range 0 – 120 kg 604305



Curved Dental Tray With removable tray with grid Tray size (in cm): W 50 x D 35 604303









HYDRAULIC TABLE

The hydraulic mechanism helps protect your back. The heavy duty frame ensures stability throughout its range. All four castors can be locked simultaneously with the foot switch.

Technical specifications

- Minimum height: 49.5 cm
- Maximum height: 98 cm
- Maximum load: 100 kg
- Four lockable castors
- Tabletop dimensions (in cm): L 122 x W 60
- Includes: 6 tie-down cleats

600200





EICKEMEYER® STAINLESS STEEL TUB TABLE

This multifunctional tube table is made entirely of high-quality stainless steel and is characterised by its ergonomic design and generous storage space.

- Stylish washbasin with drawers and storage space
- Stainless steel tub with a pool depth of 15 cm
- Rounded corners for easy cleaning
- Removable, two-part grid
- Knee room for seated activities
- Faucet with extractable shower head to 70 cm
- Two water outlet options shower and normal tap
- 3 drawers and a door
- Includes sink drainer
- Dimensions (in cm): L 140 x W 60 x H 88







SCORE® AMAZONE / JUMPER STOOLS

The ever so popular SCORE[®] treatment stools now come in fresh colours – real eye-catchers for your practice!

- Comfortable, cushioned seat
- Easily washable synthetic leather
- Smooth running double castors
- Aluminium base diameter: 54 cm

Each



SCORE® JUMPER / AMAZONE Balance Saddle Stools

The uniquely adjustable Balance mechanism from SCORE® ensures that the saddle moves subtly along with your movements. These 'micro' movements of your pelvis ensure that muscle groups and intervertebral discs are not constantly under severe static strain. This prevents pain, helps you maintain your working posture longer and exercises your core muscles. The degree of movement can be set by your own preference and adjusted by rotating the ring.





Balance Option



JUMPER



AMAZONE



AMAZONE JUMPER JUMPER AMAZONE Balance Balance Item No. Item No. Item No. Item No. 61010001 610200 61011001 610210 Black 610201 610211 610101 610111 Anthracite Capri Blue 610202 610212 61010201 61011201 610203 610213 61010301 61011301 Forest Green Burgundy 61010401 610204 61011401 610214 Orange 61010501 610205 61011501 610215 Pink 610106 610206 610116 610216 Ochre Yellow 610107 610207 610117 610217



61011201



610117



SCORE® MEDICAL TREATMENT AND OPERATING CHAIR

- Comfortable, padded seat with Ø 40 cm
- Easily washable synthetic leather cover
- Height adjustable by gas spring from approx. 55 74 cm Smooth PU double castors
- Optimal freedom of movement
- Aluminum base with Ø 54 cm

MEDICAL 610120 Black 610121 Anthracite 61012201 Capri Blue 61012301 Forest Green 61012401 Burgundy 61012501 Orange 610126 Pink 610127 Ochre Yellow

Each



With lumbar support

- Compact, functional lumbar support
- Height and inclination easily adjustable
 Colour: black
- Colour. D





With lumbar support and foot operation

- Foot operation allows easy adjusting of seat height during operations (operator remains sterile)
- Colour: black





61012501

610195

ZWEEZI SADDLE STOOL

- Padded synthetic leather seat
- Adjustable height: 58 85 cm
- Seat width: 40 cm
- Gas lift mechanism
- Base diameter: 54 cm
- 5 star base with swivable castors
- Colour: evergreen

610176





ZWOOZI ROUND STOOL

- Padded synthetic leather seat
- Adjustable height: 64 85 cm
- Seat width: 35 cm
- Gas lift mechanism
- Base diameter: 54 cm
- 5 star base with swivel castors
- Colour: evergreen





DR. MACH LED 120 / 120F EXAMINATION AND THEATRE LIGHTS

DR. MACH from Germany has been setting the standards in medical illumination technology for decades. The new generation of lights with LED technology continues this tradition and supports veterinary professionals with superior technology and design. The biggest advantages of LED technology is a guaranteed minimum life-span of 50,000 hours, its energy efficiency and almost non-existent heat production.

- Colour rendering index: Ra ≥ 95
- Electric dimmer: 50 100 %
- Light head diameter: 29 cm
- Number of LEDs: 12
- Power consumption: 18 W

DR. MACH LED 120

35,000 lux at 1 m working distance

Fixed light field: 17 cm at 1 m

DR. MACH LED 120	
Item No. Model	
611260Stand Model	1503,60
611261Wall Model	1400,00
611262Ceiling Model*, up to 3 m	1599,00

DR. MACH LED 120 F



Focusable light field: 14 – 25 cm at 1 m

45,000 lux at 1 m working distance

DR. MACH LED 130 F		
Item No.	Model	€
611263	Stand Model	1533,00
611264	Wall Model	1433,00
611265	Ceiling Model*, up to 3 m	1633,00

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, \in 115,-

DR. MACH LED 130 EXAMINATION AND THEATRE LIGHTS

The DR. MACH LED 130 has been our best selling LED light over the past years with hundreds of installations across the UK and Europe. Whether in prep, dental or in the operating theatre, the LED 130 supports veterinary professionals with superior technology, invariable reliability and great design.

- Colour rendering index: Ra ≥ 95
- Electric dimmer: 50 100 %
- Colour temperature: 4,300 kelvin
- Light head diameter: 33 cm
- Number of LEDs: 19
- Power consumption: only 28 W
- Optional sterilisable Handle (611266)

DR. MACH LED 130 PLUS

100,000 lux at 1 m working distance

Fixed light field: 12 cm at 1 m

DR. MACH LED 130 PLUS		
Item No. Model		
611736	Stand Model, mobile	1900,00
611737	Wall Model with 171 cm reach	1950,00
611738	Ceiling Model*, up to 3 m	1999,00

DR. MACH LED 130 F

70,000 lux at 1 m working distance

Focusable light field: 14 - 25 cm at 1 m

DR. MACH LED 130 F		
ltem No.	Model	
611733	Stand Model, mobile	1999,00
611734	Wall Model with 171 cm reach	2000,00
611735	Ceiling Model*, up to 3 m	2200,00

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, \in 115,-



Based on the continuing success of the LED 130, the LED 150 offers a larger light head diameter and more light intensity. The Sterilisable Handle can be removed for sterilisation and additional handles can be purchased separately.

- Colour rendering index: Ra ≥ 96
- Electric dimmer: 50 100 %
- Light head diameter: 38 cm
- Number of LEDs: 26
- Power consumption: only 35 W

DR. MACH LED 150 (SWING)

110,000 lux at 1 m working distance Colour temperature: 4,000 kelvin Fixed light field: 19 cm at 1 m

DR. MACH LED 150 FP (SWING)

130,000 lux at 1 m working distance Colour temperature: 4,300 kelvin Focusable light field: 17 – 24 cm at 1 m

9	
	612942

www.vetpood.ee

DR. MAC	H LED 150	
ltem No.	Model	€
612940	Stand Model, mobile	2600,00
612941	Wall Model with 171 cm reach	2400,00
612942	Ceiling Model*,	2600,00
	for ceiling heights of 2.60 – 3 n	n

DR. MACH LED 150 FP		
Item No.	Model	€
612946	Stand Model, mobile	2800,00
612947	Wall Model with 171 cm reach	2800,00
612948		2900,00
	for ceiling heights of 2.60 – 3 n	ו

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, \in 95,-

DR. MACH LED 300DF THEATRE LIGHTS

The latest addition to the range of the quality manufacturer DR. MACH impresses with the highest light intensity at an extremely attractive price. The light beams of the three LED clusters can be bundled using the sterilisable handle and, depending on the size of the wound area, also focused.

- 160,000 lux at 1 m working distance
- Focusable light field: 17 27 cm
- Colour rendering index: Ra ≥ 95
- Height adjustment: 118 cm
- Working area: 70 140 cm
- Number of LEDs: 36
- Lifespan of the LEDs: 60,000 hours
- Electronic brightness control on the luminaire body
- Including power supply

Ceiling Model*

With a total reach of 175 cm



For ceiling heights of 2.60 – 3 m





612925

* For ceiling lights, please order the ceiling ring (item no. 612730) separately, \in 115,-

The MAGIC 500 PLUS sets a new standard of mobility for pregnancy testing in the fi eld. With only 1.1 kg and an integrated rechargeable battery, it ensures maximum comfort and user friendliness.

Features

- Long service life: due to the long battery life of the battery supplied, unforeseen extended scanning sessions are not a problem
- Efficient workflow: Performing measurements on stored images ensures an efficient examination process
- process
 Via a WiFi connection images and videos can be transmitted wirelessly to external devices (PC, laptop, tablet, smartphone) as well as monitors
- Higher diagnostic reliability with Cine Memory (256 frames)
- Individually adjustable ultrasound image
- Protection by splash-proof venting and membrane keypad
- Mounting rings and straps for easy hanging around the neck

Areas Of application

- Pregnancy examinations in cattle and horses
- Adjustment aids for optimal work
- Standard measurements and vet pregnancy calculation
- Anti-reflective ultrasound image individually adjustable
- Measurements below 1 mm possible (fat layer thickness measurement)
- Back fat and loin thickness calculation

Technical specifications

- 15 cm LED Monitor
- Black-and-white system
- Images and video clips can be saved on the device
- Incl. a switchable, changeable transducer 6.5 MHz, linear rectal, frequency switching of: 4.5 / 5.5 / 6.5 / 7.5 MHz
- Incl. a glove for the left hand (right glove can be reordered)
- Incl. Carrying case
- Integrated battery with up to 5 hours runtime
- Dimensions (in cm): W 16 x H 16 x D 7
- Weight: 1.1 kg

303790



Unbeatable value for money!

The MAGIC 3000 PLUS impresses with many new functions and features. Advanced technologies including Power Doppler (PDI) help evaluate blood fl ow in different clinical conditions.

- High-resolution 12.1" LCD Screen, tiltable •
- Cine mode with memory function (5 sec.)
- Various measurements including •
- pregnancy calculation •
- iStation™, iClear™, iZoom™, iBeam™ and iTouch™ •
- Second probe connection for quick probe swap •
- Internal SSD storage and two USB ports
- Dimensions (in cm): W 29 x H 35 x D 17
- Lightweight: only 5.6 kg







www.vetpood.ee

PROBES FOR MAGIC 3000 PLUS / 6000 PLUS

Micro-convex 5.0 - 8.5 MHz 303710

4.0 - 7.5 MHz

Linear Rectal

304021

Linear T-shaped 5.0 - 10.0 MHz 303711

Each € 1999.



303711



304021

MAGIC 6000 PLUS PORTABLE ULTRASOUND UNIT

A new dimension in image quality

The MAGIC 6000 PLUS not only opens a new dimension of image quality in small animal abdominal sonography, the device can also be used in equine gynaecology and orthopaedics. With a powerful cine mode, you can always keep an overview even with restless patients under difficult conditions.

- High-resolution 15" display, tiltable
- Cine mode with memory function (5 sec.)
- PW and Power Doppler (PDI) with "Auto Trace"
- Optional Colour Doppler Upgrade (30374001) iStation™, iClear™, iZoom™, iBeam™, iTouch™ & iScape™ •
- Various application-specific measurements for abdomen and gynaecology including pregnancy
- calculation Second probe connection for quick probe swap
- Large internal SSD storage and two USB ports
- Dimensions (in cm): W 36 x H 36 x D 15
- Weight: 8.1 kg





CT, MRI AND ULTRASOUND POSITIONER

- Facilitates positioning of patients to allow abdominal ultrasonography
- Perfect positioning helps keep the patient calm and comfortable

Size 3

303993

€ 165,-

dogs

Suitable for large-sized

Dimensions (in cm):

W 50 x H 20 x L 130

• Robust, easy to clean and disinfect

Size 1 Suitable for cats / small dogs Dimensions (in cm): W 25 x H 10 x L 80 303991



Size 2 Suitable for mediumsized dogs Dimensions (in cm): W 35 x H 14 x L 100

303992



ULTRASOUND TABLE ATTACHMENT WITH CUTOUT

The redesigned EICKEMEYER[®] Ultrasound Table is the perfect solution for cardiac ultrasound examinations.

- Redesigned ergonomic cut out for cardiac ultrasound examinations
- 5 foldable feet for easy storage
- Ergonomically designed recess
- Provides ample elbow room for the examiner
- Compatible with Examination Tables
- (Width: 45 cm / Length: 100 cm)
- Dimensions (in cm): W 60 x H 19 x L 14

303976




Ultrasound Table Mat with Cutout For Ultrasound Table (item no. 303976) Velcro straps for a secure fit

303992





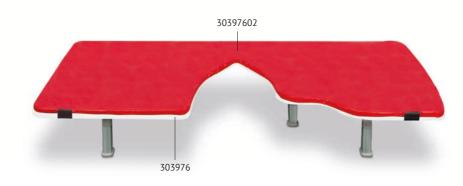

18 Hindadele lisandub käibemaks! Info ja tellimine: vetpood.ee, tel. 7362 716, tartu@estdoma.ee

Eickemeyer

EICKEMEYER® PAWSITIONER

The Pawsitioner is designed to secure patients for surgery and hands-free diagnostic imaging. It eliminates the need for tie-downs and makes it easy to clip and scrub patients in the prep room then transport them to surgery without having to re-position. The Pawsitioner is also ideal for hands-free radiographic positioning, including V-D, left or right lateral, V-D pelvis for OFA evaluation, rostral-caudal skull views and much more without re-positioning the patient for each radiograph. The cradle may also be used to hold patients for laparoscopy, CT, MRI, myelography and ultrasonography.

Complete Set

Consisting of 5 sizes and wall mount for space-saving storage 605920





QR code for the application video of the Pawsitioner

ANIMAL STRETCHER TROLLEY

We get a lot of positive feedback regarding this Animal Stretcher Trolley. It will quickly become essential for transporting patients within your practice, and you will wonder how you ever managed without it.

This mobile trolley has four lockable castors so patients can be transported and secured easily.

- 4 lockable castors
- Aluminium frame with a washable nylon cover
- Maximum load capacity: 60 kg
- Dimensions (in cm): L 120 x W 52 x H 80

605998





.....

www.vetpood.ee

PROFIDENT PLUS DENTAL UNIT

The Profident PLUS is the result of many years of experience. It offers a wide range of applications for both, general practitioners and dental specialists. It is characterised by its modern design combined with high mobility. The stand is adjustable in height and all handpieces are arranged within easy reach of the operator. When a handpiece is removed from its holder, the Profident PLUS automatically supplies air and water to it.

High Speed Turbine (300,000 rpm)

- Push button burr change for friction grip burrs (FG)
- Variable burr water cooling facility
- With LED Illumination

Low Speed Air Motor (20,000 rpm) with Straight Handpiece

- For long straight shank burrs (HP), diamond discs and prophy heads
- High torque, forward and reverse rotation
- Optional water cooling facility (item no. 174022)

Built-in Dental Scaler

- Handpiece with LED Illumination
- Includes 5 scaling tips

3 in 1 Syringe

- Precise finger tip control of water, mist or dry air
- Water connection to connect external dental scaler

(e. g. item no. 176870)

Dental Unit Air Compressor

- Powerful (340 watt)
- Quiet, 40 dB (A) (as a fan)
- Low maintenance

Micro Oil Filter

• Reduces the oil content in the compressed air down to 0.01 %

• Helps extend the life of handpieces

174001



MOBILE DENTAL CART

Turns every table into a dental treatment table!

With the Mobile Dental Cart from EICKEMEYER®, every operating or treatment table becomes an ergonomic dental treatment table.

- For attachment to operating and treatment tables
- Ergonomic, curved dental tray with grate
- Easily removable tray for cleaning
- Made of stainless steel
- With 4 lockable smooth running castors
- Height adjustable from 75 100 cm
- Tray size (in cm): W 50 x D 35
- 605105



Starter Kit

- Complete set, consisting of: • 1x Bur Kit for Contra Angle
 - 1x Bur Kit for Co
 1x Prophy Cups
 - 1x Polishing Paste
 - 1x Cleaning Brush
- EXP174004





Scaler with LED lighting



Dental Handpiece High Speed (FG)







Its compact and robust design makes this unit ideal for the majority of all routine veterinary dental procedures.

The dental scaler is a state-of-the-art Piezo system, it offers superb efficiency to remove even the most stubborn tartar with ease.

Water cooled drilling means you can run faster speeds without the risk of thermal tissue damage.

- Infinitely variable power control
- Self-regulated frequency: 27 to 32 kHz
- Driver type: piezoelectric Oscillation form: linear
- For straight and angled dental handpieces .
- With water cooling
- High torque to ensure maximum precision Self-regulated speed up to 40,000 rpm
- Handpieces not included .
- 176860



Low Speed Dental Handpiece - Contra angle (RA) With water cooling

- Compatible with Cocoon Dental Unit (176860)
- For polishing please order: Polishing Cups RA (176787)

174037





EICKSONIC II DENTAL SCALER

- With illuminated LED handpiece (removable)
- High performance (28 kHz)
- With modern Piezo technologies
- Suction power control
- Water connection hose with connector for 3/8" water line
- Very easy to use
- Compact, durable design
- Best price-performance ratio





EICKEMEYER® DENTAL POLISHER / DRILL UNIT II

www.vetpood.ee

- Compact dental micro motor for straight and angled dental ٠
- handpieces •
- Powerful and durable, quiet operation ٠
- Infinitely variable speed up to 35,000 rpm
- · Forward and reverse movement
- Choice of hand or foot switch control •
- Handpieces not included •

174028





DENTAL STARTER KIT FOR SMALL ANIMALS

The most important equipment for Dental Unit Polisher / Drill Unit II (174028) and Dental Unit EickSonic Plus LED (176880) together in one set.

Complete set, consisting of:

- Low Speed Dental Handpiece Contra Angle (RA) • (174026)
- Low Speed Dental Handpiece Straight (HP) (174027)
- Dental Burr Set (RA) (174105)
- Disposable polishing heads (HP) (174066) EICKEMEYER® Prophy Paste (176782) Dental Handpiece Lubricant Oil (174010)
- •
- Dental Handpiece Air Motor / Turbine Adapter • (17401150)
- Dental Handpiece Low Speed E-Type Adapter (17401155)





Easier, safer & faster dental surgery

DENTANOMIC instruments are premium surgical tools with superb tempered and hardened modular blades making dental extraction in dogs and cats easier, safer and faster.

- Blades are made from top quality, hardened stainless steel and cut much better than conventional instruments
- Unique modular design allows easy blade replacement when blades are blunt or damaged
- Ergonomic handle design promotes safe palm grip, only minimal finger force is required to stabilize the cutting edge
- Standard handles are perfectly balanced and sized for surgeons with hands up to 7.5 glove size

DENTANC	MIC Dental Instruments					
Item no.Description €						
175000	Ergonomic Handle, blue	75,-				
175001	Ergonomic Handle, green	75,-				
175002	Ergonomic Handle, pink	75,-				
175008	Ergonomic Handle, orange	75,-				
175009	Ergonomic Handle, purple	75,-				
175005	Ergonomic Handle, blue, longer shaft	75,-				
175006	Ergonomic Handle, green, longer shaft	75,-				
175007	Ergonomic Handle, pink, longer shaft	75,-				
175003	Ergonomic Handle, orange, longer shaft	75,-				
175004	Ergonomic Handle, purple, longer shaft	75,-				
175100	Elevator Tip, 2 mm	32,50				
175101	Elevator Tip, 3 mm	32,50				
175102	Elevator Tip, 4 mm	32,50				
175103	Elevator Tip, 5 mm	32,50				
175104	Luxation Tip, 1.5 mm	32,50				
175105	Luxation Tip, 2 mm	32,50				
175106	Luxation Tip, 3 mm	32,50				
175107	Luxation Tip, 4 mm	32,50				
175108	Luxation Tip, 5 mm	32,50				
175200	Storage and Sterilisation Rack for 9 blades	85,-				
175202	Sterilisation Container for 5 handles	130,-				
175201	Honing Pack, extra-fine	75,-				



175004





DENTANOMIC Set – Bronze

Complete Set, consisting of 2 handles (purple and gold) + elevator blade set (all sizes) + luxator blade set (all sizes) + sterilisation and storage rack

Up to glove size 7.5

From glove size 8.0

175050





175051

DENTANOMIC Set - Silver

Complete Set, consisting of 3 handles (green, blue and pink) + elevator blade set (all sizes) + luxator blade set (all sizes) + sterilisation and storage rack + honing set

Up to glove size 7.5

From glove size 8.0



175061





€ 750.-

DENTANOMIC Set - Gold

Complete Set, consisting of 5 handles (purple, gold, green, blue and pink) + elevator blade set (all sizes) + luxator blade set (all sizes) + sterilisation and storage rack + honing set + sterilisation container





www.vetpood.ee

WARMING SYSTEM FOR SMALL ANIMALS

In clinical situations, animals cannot do without the supply and regulation of external heat. Since the animal's natural thermoregulation is switched off by the anaesthesia, its core body temperature must be maintained in the normothermic range. This warming system quietly delivers forced air through a low-pressure blanket that is specifi cally designed to evenly deliver diffused warm air over the surface of the patient, helping to prevent the onset of hypothermia.

- Safe and effective management of patient body temperature
- Optimal performance through uniform heat distribution
- Extremely powerful and quiet
- Only 30 seconds to warm up
- Temperature set points: 32 °C, 38 °C, 43 °C or ambient air
- Multiple alarm options for patient safety
- Pole clamp for secure fixation
- Compact dimensions (in cm): L 16 x W 35 x H 40
- Includes: 10 disposable warming mats


648090



REUSABLE WARMING MATS

These reusable Warming Mats are placed under the patient and – thanks to their unique 3D textile structure – ensure optimal heat supply. The mats fit the body's contour perfectly, making temperature control possible in any position and without interruption at the contact points.

Warm air is distributed evenly under the patient Pressure relieving positioning Free operating fi eld Reusable and washable at 60 °C Compatible with most air warming devices Made in Germany



Especially suitable for dental interventions
 In combination with the large heating mat, ensures optimal convective heat supply from above and below
 Variable round neck suitable for different head and body sizes








Large, 115 x 60 cm 648120









The EickLoxx Micro osteosynthesis system was specially developed for the treatment of fractures in very small dogs and cats.

The angle-stable screws have a diameter of 1.2 mm. In addition, various 1.0 mm thick plates are available in different configurations.

This opens up the following indication areas, especially for dogs and cats weighing less than 3 kg as well as puppies: radius/ulna fractures, metatarsal fractures, jaw, pelvic and scapula fractures, in addition to arthrodesis and much more.

The EickLoxx Micro osteosynthesis system joins the existing EickLoxx osteosynthesis system for dogs and cats and supplements this in the increasingly important lowest weight category.

Complete set, consisting of:

- EickLoxx Micro Tray
- Drill Guide Funnel System 1.2
- Plate Screw Holding Forceps
- Twist Drill with AO Quick Coupling (Ø 1.0 mm)
- Screwdriver Blade (Torx 6)
- Screwdriver Handle
- Depth Gauge
- EickLoxx Micro Bone Plate, 7 hole, System 1.0
- EickLoxx Micro Bone Plate, 8 hole, System 1.0
- EickLoxx Micro Bone Plate, 20 hole, System 1.0
- EickLoxx Micro Bone Plate, L-plate, 9 hole, System 1.0
- EickLoxx Micro Bone Plate, T-plate, 10 hole, System 1.0
- EickLoxx Micro Bone Plate, Y-plate, 12 hole, System 1.0
- EickLoxx Micro Bone Plate, Y-plate, 13 hole, System 1.0
- EickLoxx Micro Bone Plate, 4x2 hole, System 1.0
- EickLoxx Micro Bone Plate, 2x2x2 hole, System 1.0
- 35 Titanium Locking Screws Ø 1.2 mm, magenta (from 4 10 mm)







The EickLoxx Small is a polyaxial locking kit for dogs and cats up to 15 kg.

The system distinguishes itself through the polyaxial placement of the custom-fit screws and combines the advantages of a locking plate system with polyaxial screw placement in \pm 15° longitudinal and transverse pivoting.


Compared to conventional osteosynthesis systems, the use of locking systems (internal fixation) such as the EickLoxx Small facilitates faster healing of fractures and improved implant strength. It is for this reason that the removal of plates and screws is rarely indicated.

The biologically advantageous titanium plates are available in three sizes and can be cut to the desired length and bent in three planes. Specially designed tools are included to perform this. Titanium also reduces artefacts in post-operative imaging.

EickLoxx Small is a modular system. All implants and instruments are made in Germany using only the highest quality materials.

Complete set, consisting of:

- EickLoxx Small Instrument Tray
- EickLoxx Small Implant Tray
- EickLoxx Small Screw Rack
- TAURUS Plates and Wire Cutting Pliers
- Plate Bending Pliers with Rollers
- EickLoxx Bending Levers (Pair)
- 3 Twist Drills with AO Quick Coupling (Ø 1.4 mm, Ø 1.8 mm & Ø 2.0 mm)
- 2 Screwdriver Blades (Torx 6 and 10)
- 2 Drill Guide Funnel Systems (1.7 / 2.3 and 2.7 / 3.5)
- Plate Screw Holding Forceps
- Silicone Screwdriver Handle
- 4 Plate Positioning Pins
- Depth Gauge
- EickLoxx Small Bone Plate, 46 hole, System 1.7 / 2.3, Dimensions (in mm): L 230 x W 5.0 x H 2.0
- EickLoxx Small Bone Plate, 41 hole, System 1.7 / 2.3, Dimensions (in mm): L 225 x W 6.5 x H 2.4
- EickLoxx Small Bone Plate, 28 hole, System 2.7, Dimensions (in mm): L 224 x W 8.0 x H 2.7
- 28 Titanium Locking Screws Ø 1.7, silver (from 8 20 mm)
- 28 Titanium Locking Screws Ø 2.3, gold (from 8 20 mm)
- 44 Titanium Locking Screws Ø 2.7, light blue (from 10 30 mm)
- Container, dimensions (in mm): L 312 x W 183 x H 122








The universal polyaxial osteosynthesis system for small animals The newly developed EickLoxx Large is a polyaxial locking system for dogs with a weight of approx. 15 to 45 kg.

Just like the EickLoxx Small, the system is characterised by a polyaxial placement of the precisely shaped screws and therefore combines the advantages of locking systems and the possibility of placing screws at an angle of up to \pm 15°. Like the EickLoxx Small, the EickLoxx Large offers the advantage of rapid fracture healing with improved implant strength. It is for this reason that the removal of plates and screws is rarely indicated. The biologically advantageous titanium S-shaped plates are available in eight different sizes. Thanks to special tools, the plates can be bent on all three planes. The long 12- and 14-hole plates as well as the long 34 to 40 mm screws (Ø 2.7 / 3.5 / 4.0) are not included in the basic set and can be added if required. Both plates can be integrated into the implant tray. There is space in the implant tray for the long plates and capacity for the module for the long screws in the instrument tray.

Complete set, consisting of:

- EickLoxx Large Instrument Tray
- EickLoxx Large Implant Tray
- EickLoxx Large Screw Rack
- 2 EickLoxx Large bone plate modules
- EickLoxx Bending Levers (Pair)
- 3 Twist Drills with AO Quick Coupling (Ø 2.0 mm, Ø 2.5 mm and Ø 2.9 mm)
- Screwdriver Blade (Torx 10)
- Drill Guide Funnel System 2.7 / 3.5 / 4.0
- Plate Screw Holding Forceps
- Silicone Screwdriver Handle
- 4 Plates Positioning Pins
- Depth Gauge
- 6 EickLoxx Large Bone Plates, 4.0 mm, gold (6 10 holes)
- 6 EickLoxx Large Bone Plates, 4.5 mm, light blue (6 10 holes)
- 36 Titanium Locking Screws, Ø 2.7 mm, light blue (from 10 32 mm)
- 36 Titanium Locking Screws, Ø 3.5 mm, magenta (from 10 32 mm)
- 36 Titanium Locking Screws Ø,4.0 mm, blue (from 10 32 mm)
- Container, dimensions (in mm):
 L 312 x W 183 x H 122









Zlig - the history

The tear of the anterior cruciate ligament is still one of the most common orthopaedic diseases in dogs. The path of the many surgical methods developed for this vary from intracapsular and extracapsular techniques to modern corrective osteotomies that alter the geometry of the affected knee joint. With the development of new materials in medical technology, it is now possible to replace the cranial cruciate ligament in an anatomically correct manner, instead of changing the forces acting on the joint. After a long period of preparatory work by the French Dr. Jacques-Phillipe Laboureau, a suitable synthetic ligament is now available for the intra-articular cruciate ligament replacement in small animals. Together with the instrumentation developed by EICKEMEYER®, this new technique for cruciate ligament replacement can now be performed.

Zlig - the implant

The Zlig consists of ultra-high-molecular polyethylene with the special feature that the woven structure of the implant is interrupted intra-articularly by "free fi bres". Free parallel fi bres reduce fatigue and also encourage the ingrowth of fi broblasts and collagen. Each implant is delivered in a sterile packed sleeve, making it easier to handle the implant before it is inserted into the joint. A selection of sizes with different resistances and fi bre lengths are available to fi t different patient sizes.

Zlig - the technology


In this technique, an artifi cial ligament is used as a total replacement for the anterior cruciate ligament using tunnel-tunnel-technique. The ligament is fi xed in the tibia and Os femoris using specially developed cannulated interference screws in drill channels. The screws are guided parallel to the ligament using a guiding wire to avoid deviations. The technology does not cause irreversible damage and the results are reproducible thanks to a quick learning curve. Another great advantage of the technique is the fact that patients can put weight on the hind leg immediately after the operation without any risks.

16 Fibres / 10 mm ≥5 - 8 kg ≥2,000 N 191501

24 Fibres / 15 mm №8 – 12 kg №3,000 N 191502

32 Fibres / 17 mm №12 – 25 kg №4,000 N 191503

Each



48 Fibres / 19 mm ≥25 – 45 kg ≤6,000 N 191504

48 Fibres / 22 mm 25 - 45 kg **6**,000 N **191505**

48 Fibres / 25 mm ≥25 – 45 kg **≥**6,000 N

191506

QR code for the
 application video
 of the Zlig



ZLIG – NEW TECHNIQUE FOR CRUCIATE LIGAMENT REPLACEMENT

(CRCL)

Zlig – the instrumentation

A small and inexpensive set of instruments is required to perform this new and innovative cruciate ligament surgery method. The threads of the specially developed titanium interference screws are round so they do not cause any damage to the fi bres of the Zlig.

Zlig Instrument and Screw Set

Complete set, consisting of:

- Zlig Instrument Tray with screw module for interference screws
- + 5 Twist Drills, cannulated, with round shank (Ø 2.5 / 3.0 / 3.6 / 4.2 & 5.0 mm)
- 1 Twist Drill, not cannulated, with round shank (Ø 4.0 mm)
- Hexagon KIRSCHNER Wire
- Attachment for hexagon KIRSCHNER Wire, HEX 2.5, AO coupling
- Screwdriver Handle made of silicone, HEX 2.9, AO coupling
- 2 Screwdriver Blades, cannulated (HEX 2.0 & 2.5)
- 4 KIRSCHNER Wires, trocar / trocar (Ø 1.0 & 1.8 mm)
- 4 KIRSCHNER Wires, blunt / blunt (Ø 1.0 & 1.8 mm)
- 2 Tubes for wire loops, cannulated (Ø 2.5 & 3.5 mm)
- 2 Wire Loops
- 4 Titanium Interference Screws, cannulated, Ø 3.0, blue (8 mm)
- 12 Titanium Interference Screws, cannulated, Ø 3.5, light blue (8, 10, 13 mm)
- 12 Titanium Interference Screws, cannulated, Ø 4.0, magenta (8, 10, 13 mm)
- 16 Titanium Interference Screws, cannulated, Ø 4.5, gold (10, 15, 20, 25 mm)
- 8 Titanium Interference Screws, cannulated, Ø 5.0, green (15, 20 mm)
- 8 Titanium Interference Screws, cannulated, Ø 6.0, silver (10, 20 mm)







ORTHOVET PRO BATTERY POWERED DRILL SYSTEM

The ideal tool for small animal osteosynthesis

The OrthoVet PRO is a modular, battery driven drill system designed for small animal osteosynthesis. The modular system consists of a handpiece and four attachments, which can be changed intraoperatively in just a few seconds with a keyless quick coupling.

The handpiece, the quick release AO Chuck and the Jacobs Chuck are cannulated. Thus, cannulated screws or drills can also be tracked over long guide wires in stages, without the guide wire having to be shortened. The oscillating saw has a fivefold adjustable, variable fixation of the saw blade and allows the surgeon an optimised view of the surgical fi eld. The AO quick coupling completes the system and makes the OrthoVet PRO a real all-rounder.

The handpiece and attachments can be sterilised / autoclaved. The Li-Ion Battery is not autoclavable and is inserted into the handpiece by means of special holder. Continuous operation is possible in clockwise and counterclockwise motion, as well as in oscillation with the saw attachment.

- 4 attachments: Jacobs Drill Chuck, Quick Release AO Chuck, Quick Release Chuck for KIRSCHNER wires, Oscillating Saw with Saw Blades
- Fully Cannulated Handpiece
- Autoclavable
- Includes 2 Li-Ion Batteries with Charger and Transport Case

Technical specifications

- Infinitely variable speed: 0 1,200 rpm
- Oscillation mode: 0 16,000 ocs/min
- Battery type: Li-lon
- Battery charging time: 180 min
- Weight (includes Battery): 933 g









The powerful and intuitively operated motor system for small animal osteosynthesis

The DRAGONFLY is a modular cordless drill system with 4

attachments for screwing, milling, drilling and cutting as required. Thanks to the quick coupling, the attachments can be changed intraoperatively. The handpiece itself impresses with its narrow handle design and an intuitive one-handed mechanism.

The AO attachment is cannulated, same as is the keyless chuck for KIRSCHNER drilled wires / STEINMANN nails and the Jacobs drill chuck. Both are equipped with an adjustable clamping range of up to 4.0 mm. These 3 attachments can be operated stepless in left / right rotation and also in oscillation mode at speeds from 0 - 1,350 rpm.

The DRAGONFLY is completed by attachment no. 4: the oscillating saw. It is equipped with a power of 0 – 14,000 osc/min and allows the saw blade to be used in 4 different positions. Handpiece and attachments can be autoclaved. The core, however, is the removable, non-autoclavable drive unit: This includes the control unit, the battery, the electronics and the motor control electronics and, together with the Li-Ion technology, guarantees a long service life and service life. Thus, the DRAGONFLY offers you a performance that you previously only knew from compressed air or cable-electric systems. All components are designed and manufactured in Germany.

Technical specifications

Infinitely variable speed: 0 – 1,350 rpm. Oscillation cutting mode: 0 – 14,000 osc/min. Battery type: Li-Ion.

Scope of delivery: DRAGONFLY handpiece incl. 4 attachments (AO attachment, keyless chuck for KIRSCHNER bone wires / STEINMANN nails, Jacobs drill chuck, oscillating saw), 4 saw blades with STRYKER attachment, drive unit, sterile funnel, charger and carrying case





ICARE® TONOVET PLUS TONOMETER

The Icare® TONOVET Plus is easy to use. It features an advanced user interface with a clear, large display. Red / green positioning lights help to find the correct angle and aim at the middle of the cornea. The automatic measuring sequence lets you choose between taking single readings or taking all 6 measurements with one press of the button.

- Quick, painless and accurate procedure
- Easy to use and requires no calibration
- Assisting positioning lights
- Large and easy to read colour display
- Dimensions (in mm): L 215 x W 24 29 x D 35 -95
- Weight: 230 g (incl. batteries)
- Includes: Transport Case, 100 Probes, 4x AA batteries

1736007





OR code for the application video of the TONOVET Plus

ICARE® TONOVET TONOMETER

The TONOVET is based on a rebound measuring principle, in which a Stand for TONOVET and TONOVET Plus light probe is used to make momentary, gentle contact with the cornea. The device is easy to use and the measurement is barely noticed by the animal and often does not even cause corneal reflex.

Eye pressure should be measured from:

- Young patients to establish baseline readings
- Patients older than 6 to 7 years
- Patients predisposed to glaucoma (42 canine breeds)
- Ocular examination patients
- Head or eye trauma patients
- The treatment of the patient is well tolerated with
- the absence of local anesthesia
- Quick, painless and accurate procedure
- Self-calibrating
- Portable as it is powered by batteries

Technical specifications

- Display range: 0 99 mmHg
- Power: 4x AA batteries included
- Dimensions (in cm): L 3.2 x W 24 x H 8
- Weight: 250 g (including batteries)
- Includes 100 TONOVET probes

1736005



Stand for TONOVET and TONOVET Plus Table and wall mountable 1736008



Table and wall mountable 1736008





Application

KOWA SL-19 PORTABLE SLIT LAMP

Now more ergonomic and even lighter!

With its rounded shape and curved handle design, the new KOWA SL-19 Slit Lamp is even more ergonomic. Furthermore, the weight of the hand-held unit has been significantly reduced.

- New LED backlight that can be used simultaneously with the slit light
- New LED blue light illumination for flourescence observation
- Light intensity can be adjusted with one hand
- Infinitely adjustable slit length (1.5 12 mm)
- Longer operating time: up to 6 hours at maximum intensity
- Available in 5 colors: white, black, blue, green and pink

Technical specifications

- Magnification: 10x and 16x
- Working distance: about 80 mm at 16x magnification, about
- 100 mm at 10x magnification
- Effective field of view: Ø 10 mm at 16x magnification, Ø 15 mm at 10x magnification
- Slit width: Ø 0.1, Ø0.2, Ø 0.8 mm
- Spot size: Ø 1, Ø 5, Ø 12 mm (slit length continuously adjustable from 1.5 12 mm)
- Light intensity: 200 20,000 lux (continuously adjustable)
- Power supply: 3x AA batteries (DC 4.8 6.4 V)
- Dimensions (in mm): W 197 x D 107 x H 238
- Weight (without batteries): only 620 g

173690



www.vetpood.ee

RETEVET™ PORTABLE ERG

The RETevet[™] portable ERG offers an intuitive interface that allows veterinary ophthalmologists to perform electroretinograms (ERGs) to measure the retinal function of animals.

- Small, portable and battery powered
- Intuitive user interface
- Real-time results
- All flashes electronically controlled
- Easy USB connection to any PC
- Comprehensive reports in PDF formats
- Anaesthesia is optional (based on the patient)

Technical specifications

- RGB LED technology
- Dimensions (in cm): W 10.5 x H 15.5
- Weight: 240 g
- Includes: RETevet[™] Device, Docking Station, 6 Jet Electrodes,
- 10 Needle Electrodes, Dust Cover, 3-Plug Electrode Lead, USB
- Cable, Power Adapter.



€ 7800,-





ALGERBRUSH II

The AlgerBrush II is a battery powered, handheld, low torque motorised burr. It has been designed to remove foreign bodies from the cornea or sclera of patients.


The burr in this rotary instrument is used as a "brush" rather than a drill and the foreign bodies are thus "brushed" from the eye leaving a smooth surface, which in turn heals much faster than with other instruments that could be used for this purpose.

According to the paper "Veterinary Ophthalmology" ([2013] 16, 2, [83 – 88]), it has been successfully used to treat spontaneous corneal epithelial defects (SCCEDs) in dogs in combination with a bandage contact lens.

Includes

- 3.5 mm round, medium grit diamond burr
- Chuck



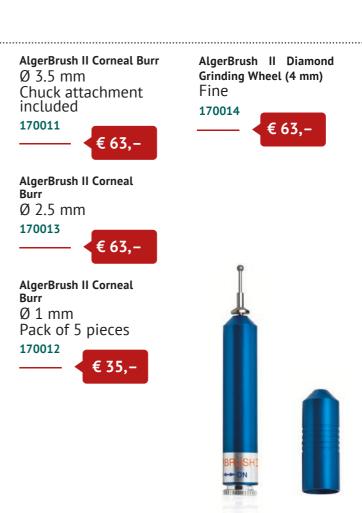

170010

BAUSCH & LOMB PUREVISION® 2 BANDAGE CONTACT LENSES

Contact bandage lenses act as a protective shield on the cornea. They permit corneal repair and improve patient comfort by preventing contact between damaged cornea and eyelids.

- High definition optics offers a clear and sharp view
- Excellent stabilisation
- Comfortable contact lens wear for up to 30 days and nights
- Ensures an optimal supply of oxygen to the cornea and makes eyes look clear
- Packaging: 6 lenses per box





HEINE OMEGA 600 INDIRECT OPHTHALMOSCOPE

Discover more. With less weight.

Lighter. Brighter. Better. HEINE kept the best and perfected the rest. Highly comfortable, the HEINE OMEGA 600 delivers a new class of technological innovation, along with the new and unique visionBOOST for significantly better diagnostic even in dense cataracts.

- Most precise diagnostic, up to the far retinal periphery
- Up to 20 % better view in media opacities with visionBOOST
- Lightest High-End Indirect Ophthalmoscope worldwide
- Long-lasting investment due to its robust design
- Easy disinfection thanks to smoothSURFACE

Most precise diagnostic, up to the far retinal periphery

- Significantly better diagnostic due to unique visionBOOST
- Sharpest fundus image due to superior glass optics
- Brightest fundus image with true colour rendering thanks to our unique LEDHQ – now in even more natural colours
- Best 3D imaging due to our unique Stereoscopic Adjustment
- Technology in dilated and undilated pupils

Includes

OMEGA 600 Indirect Ophthalmoscope (with battery and +2 D eyepiece), E4-USBC power supply with cable, eyepiece 0 D

173497

HEINE DIAGNOSTIC SET

Absolute precision is the basic requirement to ensure the creation of a high-quality product. At HEINE this principle applies to the entire production process. Complete set, consisting of:

NT 300 Double Charger (302550)

Automatic charging process and overcharge protection. Includes two NT 3.5 V Battery Handles including batteries (2x 302535). With short-circuit protection and a continuous ceramic brightness

control.

BETA 200 Direct Ophthalmoscope (301135)

A spherical optics eliminate reflexes and guarantee a full view is even with small pupils. Handle not included.

Slit Illumination Otoscope Head (300035)

Homogeneous light and a swivel lens with 1.6x magnification. Scratch-resistant swivel lens with 1.6x magnification. Light 3.5 V halogen light , Fibre Optic illumination for bright and homogeneous light.

Wide Slot for ease of use when working with catheters, foreign body forceps etc.

For mounting on HEINE BETA handles

Replacement lamp can be ordered through item no. 300038

Otoscope Specula

- High quality chrome plated metal construction, which is easy to clean, disinfect and sterilize
- Metal Speculum, 4x 57 mm (300357)
- Metal Speculum, 6x 65 mm (300365)
- Metal Speculum, 7x 90 mm (300390)

EXP302550







173497

KOMPLEKT HEINE OMEGA 600 hinnaga € 2700 + Charging battery tasuta lisaks

HEINE® LED LOUPELIGHT 2 WITH 2.5X BINOCULAR LOUPES

Brighter. Lighter. Improved functionality.

LED in HQ – the new standard in LED lighting delivers homogeneity and bright light with natural colour rendering for a precise diagnosis. The combination of light and magnification provides optimal results.

HEINE[®] LED LoupeLight 2

- Illumination: 55,000 lux
- Colour temperature: 4,000 Kelvin
- Adjustable viewing angle ensures a coaxial, shadow-free image
- Replaceable connecting cable, 1.6 m
- Including HEINE® mPack mini and USB plug-in power supply Operating time ~ 9 hours, at full power ~ 4 hours

310717

€ 1200.-

HEINE® HR binocular loupes with 2.5x magnification With i-View loupe mount on S-FRAME.

Including protective glasses, 2 sterilisable swivel levers, retaining strap, cleaning fluid, cleaning cloth and case.

Working distance: 340 mm Field of view: 90 mm Depth of view: 110 mm **310700** Working distance: 420 mm Field of view: 130 mm Depth of view: 180 mm **310707**







HEINE ML4 LED HEADLIGHT WITH MPACK UNPLUGGED & HEINE HR LOUPES

Perfect fit. Perfect view. Even with long operations.

The HEINE ML4 LED HeadLight is specially designed for healthcare professionals who need a perfect view during long surgical operations or treatments. Various individual adjustment options of the headband and the comfortable leather fi nish guarantee the highest level of comfort and a secure fi t.

HEINE® ML4 LED HeadLight with mPack UNPLUGGED

Lightweight, high-performance battery integrated on the back of the headband. Offers 100% freedom of movement! Incl. Plug-in Transformer UNPLUGGED.

311138



HEINE[®] HR Loupes

With i-View loupe holder. Including protective glasses, 2 sterilisable swivel levers, retaining strap, cleaning fluid, cleaning cloth and case.

3.5x magnification420 mm working distance311123

4x magnication 340 mm working distance 311122



311123

LED DIAGNOSTIC LIGHT

www.vetpood.ee

This high quality diagnostic light brings light into the dark for a wide range of applications – whether used with or without the spatula.

- Ideal for intubating small animals
- Convenient for examining eyes, ears, nose and throat
- Helpful for dental treatments, especially on rodents
- White LED with a lifespan of more than 100,000 hours
- Incl. 1 angled spatula and 2 AAA batteries

214200





Endoscopy Biopsy Forceps

For taking biopsies Length: 250 mm

Ø 1.0 mm

30611804

€ 299.

EICKVIEW COMPACT ENDOSCOPE SET

The specially developed EickView Compact Endoscope provides the perfect solution for rhinoscopy, tracheoscopy and vaginoscopy in small animals due to its small diameter (3.8 mm) and integrated working channel.

- Highly mobile
- Homogeneous and minimally invasive distal end
- Integrated working channel Ø 1.3 mm
- Outer diameter Ø 3.8 mm
- Working length 14 cm
- Viewing angle: 30°
- Opening angle 90° (wide-angle)
- Foreign body forceps Ø 1 mm, L 25 cm
- Attachable LED Light source
- Long battery life and spare battery with an operating time of 4 hours each
- 3 Adjustable light levels
- Stopcocks: two integrated stopcocks allow steady insufflation and irrigation
- Connection: STORZ, WOLF or ACMI connectors
- Eyepiece: DIN ocular allows the connection of all standard C-mount cameras
- Set includes: EickView Compact Endoscope incl. fitted otoscopy protection aid, portable LED light source incl. charger, foreign body forceps, spare battery, 2 cleaning brushes, padded carrying case

306122

306122



Eickemeyer

EICKVIEW PORTABLE LED VIDEO ENDOSCOPES

Due to their extremely compact dimensions, the EickView LED Video Endoscopes are the perfect solution for broncho-, gastro-, rhino-, tracheo, uretero- and vaginoscopy in dogs and cats and for the examination of the upper respiratory tract in horses. The devices work independently, as the powerful LED light source and the high resolution camera of the stand-alone systems are integrated in the distal end of the endoscopes. In addition, the folding 3.5" monitor allows both direct video and image playback as well as storage via SD card. Furthermore the EickView LED Video Endoscopes can be connected to a separate monitor.

Folding 3.5" monitor for video and picture playback Recording and archiving on integrated SD card File formats: JPG, AVI Integrated powerful LED light source Rechargeable Battery with up to 3 hours of operation USB port and video out Depth of field: 5 – 60 mm Direction of view: 0° Field of view: 110°

EickView LED Video Endoscopes							
Item No.Do	escription	Working length	Outer Ø	Working channel	Deflection		€
306009	EickView 60S	60 cm	3.3 mm	1.2 mm	up 180° down 130°		4900,-
306011	EickView 60	60 cm	4.2 mm	1.3 mm	up 180° down 130°		4900,-
306010	EickView 70	70 cm	6.0 mm	2.0 mm	up 180° down 130°		4900,-
306166	EickView 100E	100 cm	8.0 mm	2.8 mm	up 150° down 130°		4900,-
306164	EickView 150E	150 cm	8.0 mm	2.8 mm	up 130° down 130°		4900,-

Accessories						
ltem No.	Description	Diameter	Length		€	
306211	Alligator Forceps, EickView 60 / 60S	1.0 mm	120 cm		399,-	
306311	Biopsy Forceps, EickView 60 / 60S	1.0 mm	120 cm		399,-	
306214	Alligator Forceps, EickView 70	1.8 mm	120 cm		250,-	
306314	Biopsy Forceps, EickView 70	1.8 mm	120 cm		250,-	
306216	Alligator Forceps, EickView 100E /	2.4 mm	230 cm		250,-	
306316	150E Biopsy Forceps, EickView 150E	2.4 mm	230 cm		250,-	





306314



You can now combine the new EickView HD Video Endoscope System according to your wishes and requirements.

EickView HD Video Processor

The EickView HD Video Processor is the central hub of your video endoscope system. The powerful LED light source enables optimal illumination in any position. Various settings on the video processor allow you to adapt the image quality to your needs. The new HbE mode enables an improved display of vessels. Still images can easily be saved directly to a USB storage medium. The image data can be transferred to an existing PC or Laptop.

306167



EickView PRO HD Upgrade

The EickView PRO HD Upgrade turns the HD Video Processor into a stand-alone and mobile

endoscopy unit. Furthermore it opens access to other endoscopic disciplines such as arthroscopy, rhinoscopy, otoscopy, etc. The foldable and rotatable Full HD touchscreen Tablet provides greater functionality because the tablet can not only be used to view images and videos but also for recording, storage and editing. Keyboard is available as an option.






EickView HD Video Endoscopes

Due to further improved video chips, the EickView HD Video Endoscopes deliver even more brilliant images. The main areas of application are bronchoscopy and gastroscopy. Due to the large number of available scope sizes, they are suitable for all applications in small animals and equine.

Technical specifications

Viewing direction: 0°. Distal end contains 1 CMOS camera chip, 2 light guides, working channel.

Scope of delivery: EickView video endoscope, pressure tester, 2 cleaning brushes, cleaning set, carrying case.

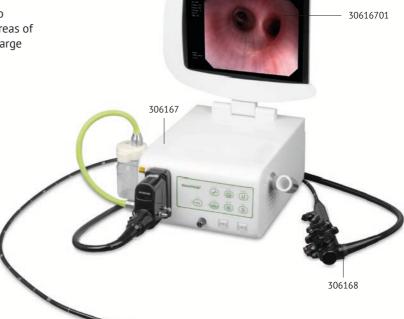

EickView	ickView HD Video Endoscopes									
ltem	No.Description	Working length	Outer Ø	Working channel	Depth of fi el	d Field of view	Deflection		€	
306177	EickView 60 HD Endoscope	60 cm	3.5 mm	1.2 mm	3 – 50 mm	120°	up 160° down 130° left / right 0°		8200,-	
306178	EickView 100 HD Endoscope	100 cm	6.0 mm	2.0 mm	3 – 50 mm	120°	up 210° down 90° left / right 100°		8200,-	
306168	EickView 150 HD Endoscope	150 cm	8.5 mm	2.0 mm	5 – 100 mm	≥ 140°	up 210° down 90° left / right 100°		4900,-	
306169	EickView 150L HD Endoscope	150 cm	9.2 mm	2.8 mm	5 – 100 mm	≥ 140°	up 210° down 90° left / right 100°		4900,-	
306170	EickView 300 HD Endoscope	300 cm	13.0 mm	3.2 mm	5 – 100 mm	≥ 140°	up 210° down 90° left / right 100°		5200,-	

ENBIO S B-CLASS AUTOCLAVE

Simple – reliable – fast

The Enbio S is the fastest B-class autoclave on the market. Thanks to its compact size, it fi ts into every practice and the sterilisation chamber offers enough space for a standard surgical kit. The Enbio S is set up in no time and it is simple and intuitive to use – switch it on, select the mode, sterilise – done!

- Extremely short program times of only 7 to 15 minutes
- Revolutionary low operating costs thanks to Magic Filter
- Very quiet operating noise of only 32 dBA
- Automatic documentation on USB stick
- Highest quality at a low price
- External dimensions (in mm): W 252 x H 162 x D 561
- Weight: 15 kg







STERIHERO VET MELAG B CLASS AUTOCLAVE

Your new superpower in veterinary medicine.

No matter what big tasks the day throws at you, SteriHero Vet has your back – from the functions to the price! Powerful technologies, an intuitive smart touch display and the unique MELAG quality – made in Germany – give you the superpower to change everything!

- B Class autoclave for the safest sterilisation
- High loading capacities and short cycle times from 16 minutes
- Intuitive operating concept with large smart touch display
- Easy to fill, integrated water tank
- Holder for holding 5 trays (3 included)
- Chamber volume: 23 l, D 45 cm, Ø 25 cm
- Outside dimensions (in cm): W 47 x H 50 x D 64
- Weight: 49 kg





EICKSONIC ULTRASONIC CLEANERS

- steel housing for easy and safe instrument cleaning and excellent cleaning results.
- Timer: 0 30 min .
- . Heating: 20 - 80 °C
- Stainless steel basket protects cleaning material and vibrating tub .
- Stainless steel lid reduces noise .
- Operating frequency: approx. 40 kHz •
- Mains voltage: 50 / 60 Hz •
- Mains connection: 220 240 V •
- Incl. stainless steel lid and screen basket •

EickSonic 3.2 Tub capacity: 3.2 liters

Working capacity: 2.8 liters Ultrasonic power: 120 watts Heating capacity: 150 watts Without drain tap

Dimensions: Device – outside (in cm): L 26.5 x W 16.5 x H 22.5 Device – outside (in cm): L 32.5 x W 17.5 x H 27 Tub - inside (in cm): L 24 x W 13.5 x H 10

561032







EickSonic 6.5

With drain tap

Dimensions:

Tub capacity: 6.5 liters

Working capacity: 5.8 liters

Ultrasonic power: 180 watts

Heating capacity: 300 watts

Tub - inside (in cm): L 30 x W 15 x H 15

BLOOD PRESSURE MEASUREMENT FOR DOGS AND CATS

Reliable and accurate non-invasive blood pressure monitor for small animals.

EICKEMEYER® Doppler

- Compact, hand-held design
- High sensibility for a clear signal
- Adjustable sound volume and headphone connection
- Focused 8 MHz Probe with wide beam for better
- flow detection in the artery
- Probe adapted for positioning on the animals tail or paw
- Rechargeable battery powered, operating time: ± 6 hours
- Dimensions (in mm): L 175 x W 80 x H 25 mm
- Lightweight (300 g)







EICKEMEYER® MICROSCOPE

- A basic microscope with good optical quality at an affordable price
- Binocular head Siedentopf type, 30°
- Widefi eld eyepieces WF10x/18 mm
- Achromatic objectives 4x/0.1, 10x/0.25, 40x/0.65, 100x/1.25 oil
- Köhlersche illumination system, 12V /20 W halogen lamp
- Blue filter
- Abbe condenser 1.25 N.A.
- Mechanical stage 190 x 140 mm

710061





GUTTER SPLINTS

- For temporary immobilisation of fractures
- Strong and lightweight plastic, green
- Comfortable, non-irritating foam padding
- Anatomically shaped, fully radiolucent
- Scoop end to be placed at toes

Width: 3 cm, Length: 20 cm

951720

Width: 5 cm, Length: 40 cm **951740**





Width: 4 cm, Length: 30 cm **951730**





.....

INFUSION STAND

- Height adjustable from 110 200 cm
- Stable plastic cross with 4 hooks
- Chrome fi nish
- Holder with dropper glass (plastic)
- 5 star castor base
- 2 brake castors
- 573106





.....

SURGICAL DRAPES PVC

Made of soft, tear-resistant PVC. Excellent adhesive properties with spray adhesive. Individually packaged – sterile. Pack of 25 pieces.

